


Accentra Series™

Catalog Number

Type

Project Name

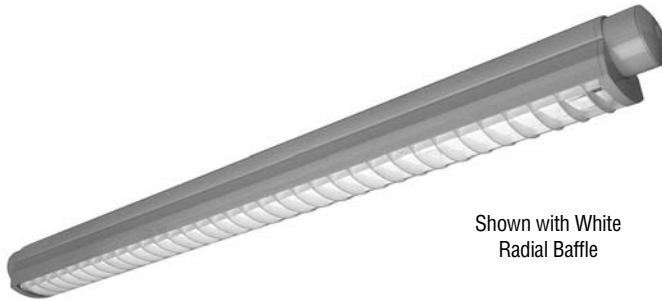

Shown with White Radial Baffle

ACC02

3 1/4" x 3 1/4"

Rotatable (359°)

(T5 or T5HO Lamps)

S P E C I F I C A T I O N S

Housing

One-piece, .063" thick extruded aluminum with locking provisions on both ends. Die-cast aluminum support modules and end plates are secured with no visible fasteners. Standard lengths are 2', 3', 4', 6' and 8'. Provisions may be made for continuous rows. Contact factory for row lengths over 48' for 120v and over 112' for 277v.

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability. Standard finish for stems and canopies is white.

Optical Controls

- (GDOP) General Distribution Open
- (GDBW) General Distribution White Aluminum Radial Baffle
- (GDBB) General Distribution Black Aluminum Radial Baffle

Reflectors

For General Distribution – Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL Listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry


All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Controls

Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

Certification

All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.



Standard Lengths:
2', 3', 4', 6' and 8'

Series
ACC02

Mounting

CT = Cable (15/16" Tbar) Fully Adjustable (36" Standard)
CN = Cable (Non-Tbar) Fully Adjustable (36" Standard)
P = Rigid Stem (Up to 48" Standard)
K = Swivel Stem (Up to 48" Standard)
JT = Tbar Ceiling Mounting
JN = Non-Tbar Ceiling Mounting
W = Wall (6", 12", 18", 24")

ACC02-3-W(24)-GDBW-F01M-V-T5HO-□

Optical Controls

GDOP
General Distribution Open

GDBW
General Distribution White Aluminum Radial Baffle

GDBB
General Distribution Black Aluminum Radial Baffle

Standard Finishes

F01M Matte White
Premium Finishes
F01G Gloss White
F02 Ivory
F03 Stonewash
F04 Camel
F05 Gray Day
F06 Pebble Beach
F07 Steel
F08 Gray Seal
F09 Mocha
F10 Bronzed
F11 Black
F12 Ultrasonic Clear
F13 Merlot
F14 Red Skies
F15 Lemon
F16 Forest Hunter
F17 Olive
F18 Khaki
F19 Heather Green
F20 Blue Print
F21 Reflex Blue
F22 Navy
FCC Custom Color

Voltage

120
277
* 347
* Contact Factory

Lamp Type

T5
T5HO

Options

SS-L/R (Left/Right) (N/A for 2' or 3')
Lamp Row Switching (Common Neutral Utilized)

Dim (N/A for 2' or 3')
Dimming

NLCKT (N/A for 2' or 3')
Separate Night Light Circuit

EMCKT (N/A for 2' or 3')
Separate Emergency Circuit

EBPL (N/A for 2' or 3')
Emergency Battery Pack (635-700 Lumens)

EBPH (N/A for 2' or 3')
Emergency Battery Pack (975-1325 Lumens)

FS
Fused Ballasts

GTD (N/A for 2' or 3')
Generator Transfer Device



