


Catalog Number	Type
Project Name	


AR600

Connector Specifications


S P E C I F I C A T I O N S



90° Elbow



3-Way "T"



4-Way "X"

Cast connectors are not available for the AR622 and AR623. Consult the factory for available connector options.

AR600 Series 6 3/4" Round.

Construction One piece .188" thick cast aluminum with internal joiner plates.

Finish Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil. minimum thickness) to assure aesthetics and durability.

H O W T O O R D E R

Standard connectors are 2-way, 3-way "T", and 4-way "X".
Optional variable degree connectors are also available.

Catalog Logic


All connectors should be specified and ordered as follows:

<p>SERIES</p>	<p>Mounting CN = Cable (Non-Tbar) Fully Adjustable (36° Standard) P = Rigid Stem (Up to 48° Standard) K = Swivel Stem (Up to 48° Standard)</p>
<p>A R 6 0 0 - L 9 0 - C N - F 0 1 G</p>	
<p>CONNECTOR TYPE L90 = 90° Elbow T = 3-Way Connector X = 4-Way Connector L_° = (Specify angle)</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin-top: 10px;"> <p style="text-align: center;">*30° minimum</p> </div>	<p>Standard Finishes F01M Matte White Premium Finishes F01G Gloss White F13 Merlot F02 Ivory F14 Red Skies F03 Stonewash F15 Lemon F04 Camel F16 Forest Hunter F05 Gray Day F17 Olive F06 Pebble Beach F18 Khaki F07 Steel F19 Heather Green F08 Gray Seal F20 Blue Print F09 Mocha F21 Reflex Blue F10 Bronzsd F22 Navy F11 Black FCC Custom Color F12 Ultrasonic Clear</p>




AR600 Series (T8 Lamps)*

Standard Fixture Lengths and Mounting Centers.**





Stem & Cable – Direct Configurations

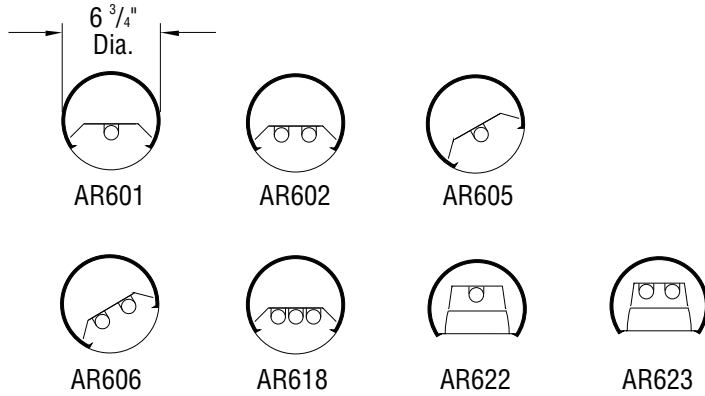





FIXTURE LENGTH	MOUNTING CENTERS
Dim "A"	Dim "B"
4' - 0 3/8"	3' - 0"
8' - 0 3/8"	7' - 0"
12' - 0 3/8"	11' - 0"

Stem & Cable – Indirect & Indirect/Direct Configurations

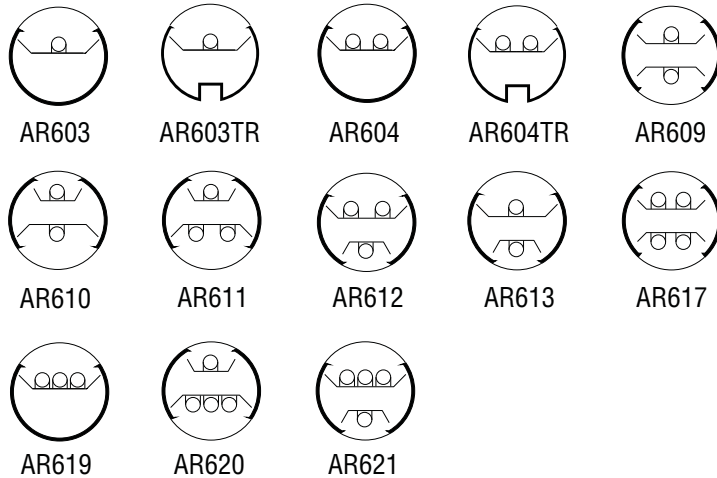

FIXTURE LENGTH	MOUNTING CENTERS
Dim "A"	Dim "B"
4' - 4 3/8"	4' - 2"
8' - 4 3/8"	8' - 2"
12' - 4 3/8"	12' - 2"

Wall Mount – All Configurations

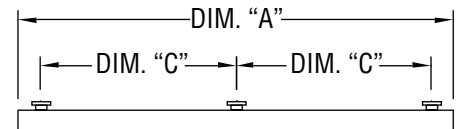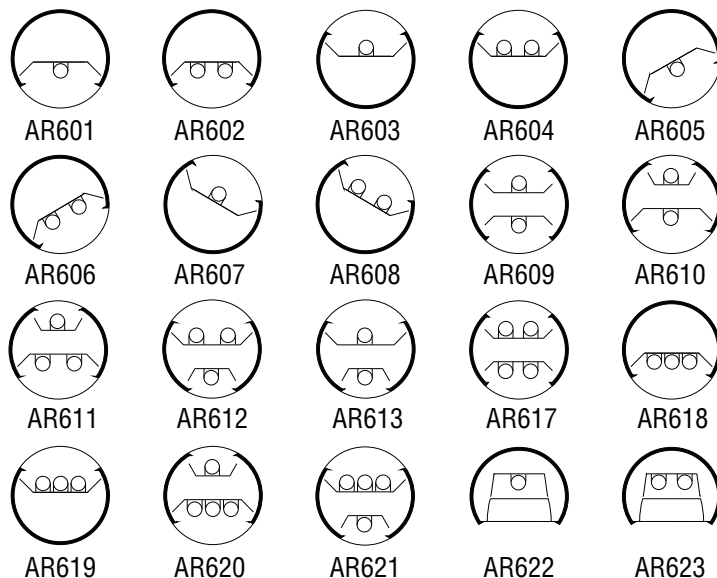

FIXTURE LENGTH	MOUNTING CENTERS	
Dim "A"	Dim "B"	Dim "C"
4' - 0 3/8"	3' - 0"	—
8' - 0 3/8"	7' - 0"	—
12' - 0 3/8"	—	5' - 6"

PAL RESERVES THE RIGHT TO CHANGE PRODUCT DESIGN AND SPECIFICATIONS. CONTACT FACTORY FOR MOST RECENT PRODUCT INFORMATION.



*Note: Contact factory for data on fixtures for T5 or T5HO lamps.

**Note: Contact factory for Ceiling Mount, Telescoping End Mount and Rotatable Mount Data.

Precision Architectural Lighting 4830 Timber Creek Drive Houston, Texas 77017

Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com