


Round Series

Shown with Linear Prismatic Lens

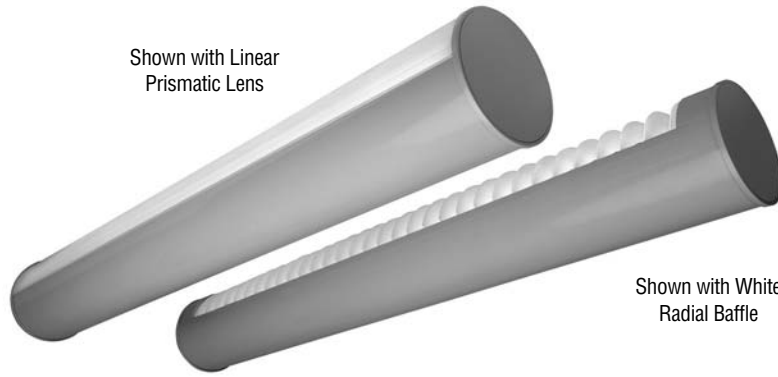

Shown with White Radial Baffle

Catalog Number

Type

Project Name

AR603 • AR603TR • AR604 • AR604TR • AR619

S P E C I F I C A T I O N S

Housing

One-piece .125" thick extruded aluminum. Die-cast aluminum end plates are secured with no visible fasteners. Standard lengths are 4', 8' and 12'. Provisions may be made for patterns and continuous rows of any length.

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability. Standard finish for stems and canopies is white.

Indirect Optical Controls

- (LP) Clear extruded 100% DR acrylic linear prismatic lens
- (BW) One-piece white aluminum radial baffle
- (WD) Clear extruded 100% DR acrylic linear prismatic wide distribution lens
- (OP) Open

Reflectors

Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Track Provision

Recess will accept any track up to 1 1/2" wide x 15/16" deep. Track and accessories are supplied and installed by others.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD. Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.


Controls

Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.


Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.


6 3/4" Round
110° Indirect Aperture
(T8, T5 or T5HO Lamps)




AR603



AR603TR



AR604



AR604TR

Standard Lengths:
4', 8' and 12'

Series

AR603
AR603TR
AR604
AR604TR
AR619

Mounting

CN = Cable (Non-Tbar) Fully Adjustable (36" Standard)
P = Rigid Stem (Up to 48" Standard)
K = Swivel Stem (Up to 48" Standard)
W = Wall
T = Telescoping End

AR619-12-CN-LP-F01M-V-T8-[]

Indirect Optical Controls

LP
Linear Prismatic Lens

BW
White Radial Baffle

WD
Wide Distribution Lens
(AR603 and AR603TR only)

OP
Open

Standard Finishes

F01M Matte White
Premium Finishes
F01G Gloss White
F02 Ivory
F03 Stonewash
F04 Camel
F05 Gray Day
F06 Pebble Beach
F07 Steel
F08 Gray Seal
F09 Mocha
F10 Bronzed
F11 Black
F12 Ultrasonic Clear

F13 Merlot
F14 Red Skies
F15 Lemon
F16 Forest Hunter
F17 Olive
F18 Khaki
F19 Heather Green
F20 Blue Print
F21 Reflex Blue
F22 Navy
FCC Custom Color

Voltage

120
277
347

Lamp Type

T8
T5
T5HO

Options

SS-I/O (Inboard/Outboard)
Lamp Row Switching
(Common Neutral Utilized)

SS-L/R (Left/Right)
Lamp Row Switching
(Common Neutral Utilized)


NLCKT
Separate Night Light Circuit

EMCKT
Separate Emergency Circuit

EBPL
Emergency Battery Pack
(635-700 Lumens)

EBPH
Emergency Battery Pack
(975-1325 Lumens)

AR619



AR619



Precision Architectural Lighting 4830 Timber Creek Drive Houston, Texas 77017

Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com

