


Delgada Series™

Catalog Number

Type

Project Name

Shown with 4 1/2" Extended End and Round Perf Lens

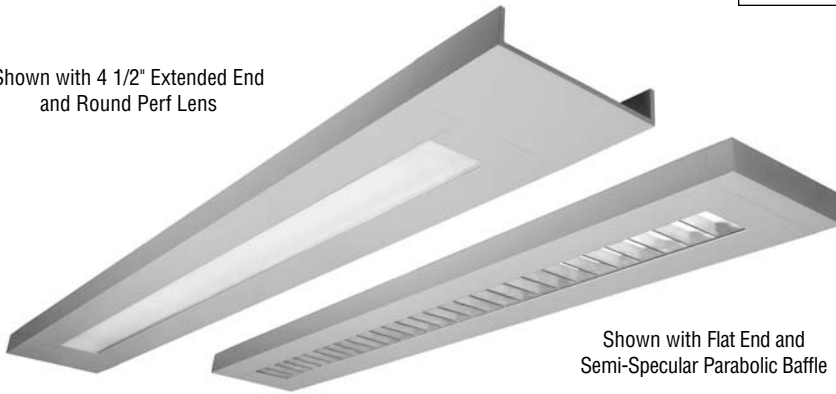

Shown with Flat End and Semi-Specular Parabolic Baffle

DRS01

7 1/4" x 2" Indirect/Direct (T8 Lamps)

S P E C I F I C A T I O N S

Housing

Two-piece .080" thick extruded aluminum. Standard lengths are 4' and 8'. Provisions may be made for patterns and continuous rows of any length.

End Caps

- (FE) Flat End – .100" thick die-cast aluminum finished to match fixture housing and secured with no visible fasteners
- (XE) 4 1/2" Extended End – .100" thick die-cast aluminum finished to match fixture housing and secured with no visible fasteners

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability. Standard finish for stems and canopies is white.

Indirect Optical Controls

- (OP) Open Top Nominal 70%↑ 30%↓
- (OC2) Reflector Nominal 20%↑ 80%↓
- (OC4) Reflector Nominal 40%↑ 60%↓
- (DC) Clear Extruded 100% Acrylic Dust Cover

Direct Optical Controls

- (PB) 3/4" deep semi-specular aluminum parabolic baffle with blades on 1 1/2" centers
- (PBW) 3/4" deep white aluminum parabolic baffle with blades on 1 1/2" centers

- (RDPL) .118" thick acrylic optical panel with .080" round openings on .110 centers (50% open area)
- (SQPL) .118" thick acrylic optical panel with .080" square openings on .110 centers (50% open area)
- (MPL) .115" thick acrylic compression molded micro-prismatic lens

Reflectors

Die-formed from .020" thick high reflectance specular aluminum.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring


All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Controls

Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

Certification

All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.



Shown with Optional Indirect Optical Control Reflector

Standard Lengths:

4' and 8'

Mounting

CT = Cable (15/16" T-bar) Fully Adjustable (36" Standard)
CN = Cable (Non-T-bar) Fully Adjustable (36" Standard)

Series
DRS01

DRS01-XE-8-CT-OP/MPL-FO1M-V-T8-[]

End Caps	Indirect Optical Controls	Direct Optical Controls	Standard Finish	Voltage	Lamp Type	Options
FE Flat End	OP Top 70%↑ 30%↓	PB Semi-Specular Parabolic Baffle	F01M Matte White	120	T8	NLCKT Separate Night Light Circuit
XE 4 1/2" Extended End	OC2 Top 20%↑ 80%↓	PBW White Parabolic Baffle	Premium Finishes	277		EMCKT Separate Emergency Circuit
	OC4 Top 40%↑ 60%↓	RDPL Round Perf Lens	F01G Gloss White	347		EBPL Emergency Battery Pack (635-700 Lumens)
	DC Dust Cover	SQPL Square Perf Lens	F02 Ivory			EBPH Emergency Battery Pack (975-1325 Lumens)
		MPL Micro-Prismatic Lens	F03 Stonewash			Dim Dimming
			F04 Camel			FS Fused Ballasts
			F05 Gray Day			GTD Generator Transfer Device
			F06 Pebble Beach			AO Translucent White Acrylic Overlay above Baffle
			F07 Steel			DS Integral Mount Daylight Sensor
			F08 Gray Seal			
			F09 Mocha			
			F10 Bronzed			
			F11 Black			
			F12 Ultrasonic Clear			
			F13 Merlot			
			F14 Red Skies			
			F15 Lemon			
			F16 Forest Hunter			
			F17 Olive			
			F18 Khaki			
			F19 Heather Green			
			F20 Blue Print			
			F21 Reflex Blue			
			F22 Navy			
			FCC Custom Color			



DRS01

Indirect/Direct - T8 Lamps

DRS01-OP/PB-T8

Open Up / Semi-Specular Baffle Down


Catalog Number: DRS01-X-4-X-OP/PB-F01M-120-T8

Report Number: LTL#22913.ies

Luminaire Description: Extruded Aluminum Housing with Specular Aluminum Reflector and Semi-Specular Aluminum Baffle Open Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 87.2%
66% Up 34% Down

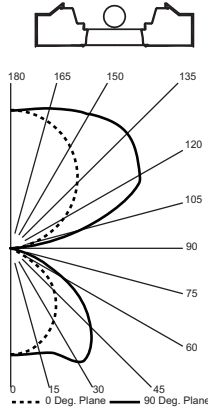

DRS01-OP/MPL-T8

Open Up / Micro-Prismatic Lens Down


Catalog Number: DRS01-X-4-X-OP/MPL-F01M-120-T8

Report Number: LTL#22466.ies

Luminaire Description: Extruded Aluminum Housing with Specular Aluminum Reflector and Micro-Prismatic Acrylic Lens Open Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 89.3%
73% Up 27% Down

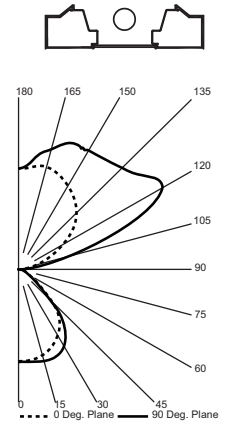

DRS01-OC4/PB-T8

OC4 Panel Up / Semi-Specular Baffle Down


Catalog Number: DRS01-X-4-X-OC4/PB-F01M-120-T8

Report Number: LTL#22912.ies

Luminaire Description: Extruded Aluminum Housing with White Aluminum Reflector and Semi-Specular Aluminum Baffle Optical Control Panel on Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 73.9%
36% Up 64% Down

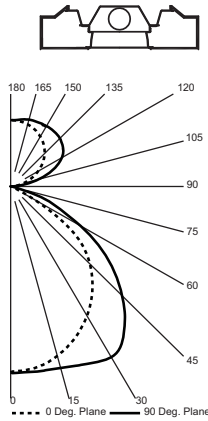

DRS01-OC4/MPL-T8

OC4 Panel Up / Micro-Prismatic Lens Down


Catalog Number: DRS01-X-4-X-OC4/MPL-F01M-120-T8

Report Number: LTL#22919.ies

Luminaire Description: Extruded Aluminum Housing with White Aluminum Reflector and Micro Prismatic Acrylic Lens Optical Control Panel on Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 75.4%
39% Up 61% Down

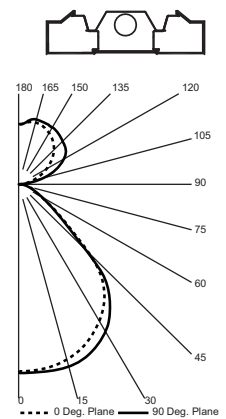

DRS01-OC2/PB-T8

OC2 Panel Up / Semi-Specular Baffle Down


Catalog Number: DRS01-X-4-X-OC2/PB-F01M-120-T8

Report Number: LTL#24016.ies

Luminaire Description: Extruded Aluminum Housing with White Aluminum Reflector and Semi-Specular Aluminum Baffle Optical Control Panel on Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 69.1%
20% Up 80% Down

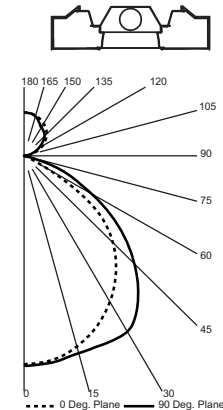

DRS01-OC2/MPL-T8

OC2 Panel Up / Micro-Prismatic Lens Down


Catalog Number: DRS01-X-4-X-OC2/MPL-F01M-120-T8

Report Number: LTL#24018.ies

Luminaire Description: Extruded Aluminum Housing with White Aluminum Reflector and Micro Prismatic Acrylic Lens Optical Control Panel on Top

Lamp: One Philips F32T8/841/ALTO Rated at 2850 Lumens

Total Luminaire Efficiency = 69.9%
21% Up 79% Down

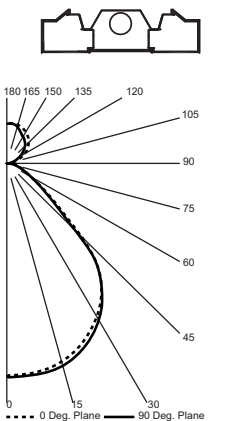

Visit www.pal-lighting.com for complete photometric reports.

