


Catalog Number	Type
Project Name	

Luminata Series™

Perforated Housing shown with Sculpted End Cap

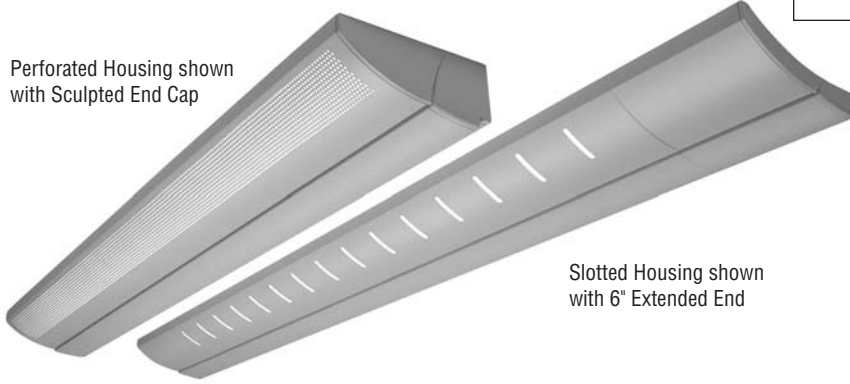

Slotted Housing shown with 6" Extended End

LMP02

6 1/2" x 2 7/8" Indirect
(T8, T5 or T5HO Lamps)

S P E C I F I C A T I O N S

Housing

- (PH) Perforated Housing - Two-piece .070" thick extruded aluminum with perforated hole pattern along front side. Perforations to be .125" on .185" staggered centers and backed with a translucent white acrylic diffuser.
- (SL) Slotted Housing - Two-piece .070" thick extruded aluminum with slotted hole pattern along front side. Slots to be 1/4" wide by 1 7/8" long on 3" centers and backed with a translucent white acrylic diffuser.
- (SH) Solid Housing - Two-piece .070" thick extruded aluminum.

End Caps

- (SE) Sculpted End - .090" thick die-cast aluminum finished to match fixture housing and secured with no visible fasteners.
- (XE) Extended End - 6" extension of extruded aluminum housing with a .125" low profile die cast aluminum end cap finished to match fixture housing and secured with no visible fasteners.

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability.

Reflectors

- (WR) Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.
Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring


All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Controls


Contact factory for daylight and/or occupancy sensor controls.

Certification

All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.



T8



T5 or T5HO

Standard Lengths: 4', 8' and 12'
For Continuous Rows see Note below

Mounting
W = Wall

Series
LMP02

LMP02-PH-XE-WR-12-W-FO1M-V-T8-[]

Housing Style	End Caps	Reflector	Standard Finishes	Voltage	Lamp Type	Options
PH Perforated	SE Sculpted End	WR White	F01M Matte White Premium Finishes F01G Gloss White	120	T8	SS-L/R (Left/Right) Lamp Row Switching (Common Neutral Utilized)
SH Solid	XE 6" Extended End		F02 Ivory	277	T5	NLCKT Separate Night Light Circuit
SL Slotted			F03 Stonewash	347	T5HO	EMCKT Separate Emergency Circuit
			F04 Camel			EBPL Emergency Battery Pack (635-700 Lumens)
			F05 Gray Day			EBPH Emergency Battery Pack (975-1325 Lumens)
			F06 Pebble Beach			
			F07 Steel			
			F08 Gray Seal			
			F09 Mocha			
			F10 Bronzed			
			F11 Black			
			F12 Ultrasonic Clear			
			F13 Merlot			
			F14 Red Skies			
			F15 Lemon			
			F16 Forest Hunter			
			F17 Olive			
			F18 Khaki			
			F19 Heather Green			
			F20 Blue Print			
			F21 Reflex Blue			
			F22 Navy			
			FCC Custom Color			

Note: For continuous rows over 12' specify nominal row length in 1' increments.

Dim Dimming
FS Fused Ballasts
GTD Generator Transfer Device
DC Clear Extruded 100% DR Acrylic Dust Cover
DL Damp Location



