


Luminata Series

Connector Specifications

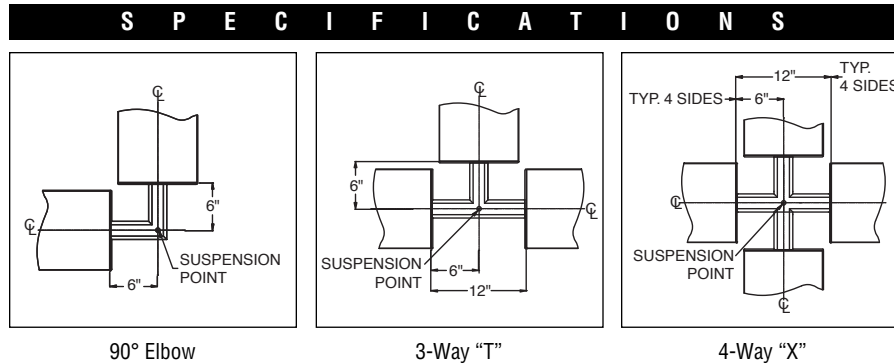

Luminta Series	10" x 2 11/16"
Construction	One piece .156" thick cast aluminum.
Finish	Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil. minimum thickness) to assure aesthetics and durability.

H O W T O O R D E R

Standard Connectors are 2-way 90°, 3-way "T", and 4-way "X".

Catalog Logic

All connectors should be specified and ordered as follows:

Series	Mounting
	CN = Cable (Non-Tbar) Fully Adjustable (36" Standard) P = Rigid Stem (Up to 48" Standard) K = Swivel Stem (Up to 48" Standard)
LMS - L90 - CN - F01M	
Connector Type	Standard Finishes
L90	F01M Matte White
90° Connector	Premium Finishes
T	F01G Gloss White
3-Way Connector	F02 Ivory
X	F03 Stonewash
4-Way Connector	F04 Camel
	F05 Gray Day
	F06 Pebble Beach
	F07 Steel
	F08 Gray Seal
	F09 Mocha
	F10 Bronzed
	F11 Black
	F12 Ultrasonic Clear
	F13 Merlot
	F14 Red Skies
	F15 Lemon
	F16 Forest Hunter
	F17 Olive
	F18 Khaki
	F19 Heather Green
	F20 Blue Print
	F21 Reflex Blue
	F22 Navy
	FCC Custom Color

*Tbar mounting is not applicable when utilizing Connectors to form patterns.




Luminata Series



Standard Fixture Lengths and Mounting Centers

Stem & Cable - Indirect Configurations

LED:




Fluorescent:



EXTENDED END OPTION






FIXTURE LENGTH DIM. "A"	MOUNTING CENTERS DIM. "B"
36 1/2"	24"
60 1/2"	48"
108 1/2"	96"
156 1/2"	144"



SCULPTED END OPTION


FIXTURE LENGTH DIM. "A"	MOUNTING CENTERS DIM. "B"
24 1/2"	24"
48 1/2"	48"
96 1/2"	96"
144 1/2"	144"

Fluorescent:




EXTENDED END OPTION

FIXTURE LENGTH	MOUNTING CENTERS	
DIM. "A"	DIM. "B"	DIM. "C"
60 1/2"	36"	—
108 1/2"	84"	—
156 1/2"	—	66"

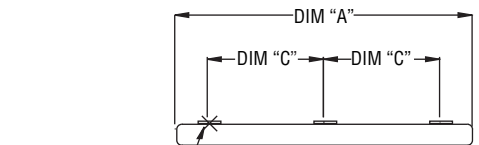

FEED ENTRY - TYP.



SCULPTED END OPTION

FIXTURE LENGTH	MOUNTING CENTERS	
DIM. "A"	DIM. "B"	DIM. "C"
48 1/2"	36"	—
96 1/2"	84"	—
144 1/2"	—	66"

PAL RESERVES THE RIGHT TO CHANGE PRODUCT DESIGN AND SPECIFICATIONS CONTACT FACTORY FOR MOST RECENT PRODUCT INFORMATION.



Precision Architectural Lighting 4830 Timber Creek Drive Houston, Texas 77017
Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com