


Microlinea Recessed Series 3

(Nominal 3" Luminous Aperture)

Catalog Number	Type
Project Name	

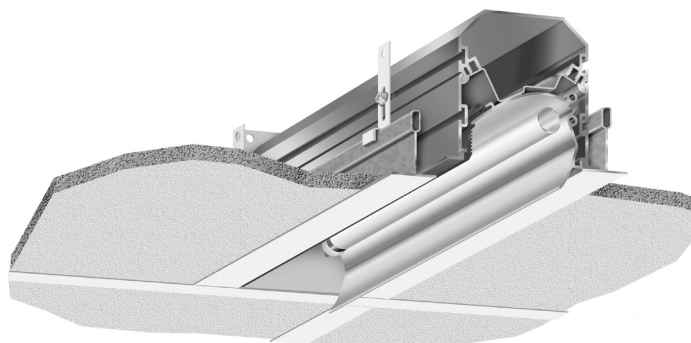

Asymmetric Wall Wash 15/16" or 9/16" Grid with Flush Tile

(T5 or T5HO Lamps)

S P E C I F I C A T I O N S

Housing

Three piece extruded aluminum with single length sections of 2' or 4'. Consult factory for row lengths longer than 4'.

Optical Controls

- Open
- (CAE) Clear Acrylic Enclosure (Snap-in)

Reflector

Three piece extruded aluminum assembly. Upper and lamp side extrusions are specular. Wall side extrusion is baked "flat black" powder coat to minimize glare to room side.

Ballast


Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry


All fixtures are factory pre-wired for a single circuit.

Certification


All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.



MLR3WW-FT



Shown with optional Clear Acrylic Enclosure (CAE)

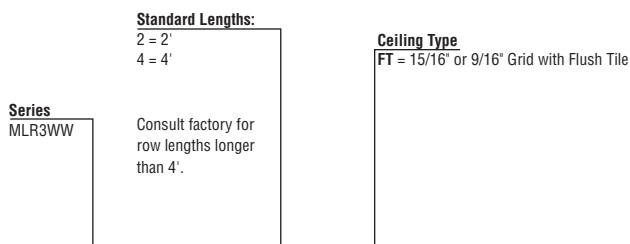

M L R 3 W W - 4 - F T - 1 2 0 - T 5 - []

Voltage

120
277
347

Lamp Type

T5
T5HO

Options

EBPL
Emergency Battery Pack
(635-700 Lumens)
(N/A for 2' or 3')

EBPH
Emergency Battery Pack
(975-1325 Lumens)
(N/A for 2' or 3')

CAE
Clear Acrylic Enclosure

Dim
Dimming

FS
Fused Ballasts

GTD
Generator Transfer
Device
(4' only)

CP
Chicago Plenum

