



Microlinea™ Recessed Series 5 - Fluorescent (5 1/8" Luminous Aperture)

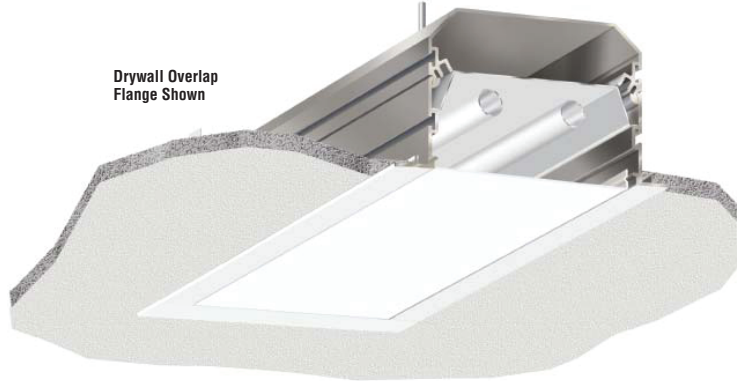


Drywall Overlap Flange Shown

Catalog Number	Type
Project Name	


1/2" or 5/8" Thick Drywall Ceilings (1 or 2 - T5 or T5HO Lamps)

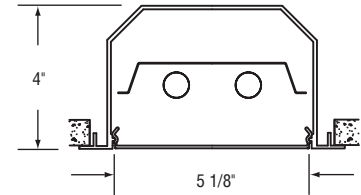


MLR5-2-OF
Drywall Overlap Flange
Shown with Flush Lens

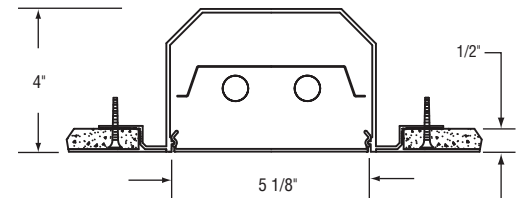

MLR5-2-SF1
Drywall Spackle Flange
Shown with Flush Lens

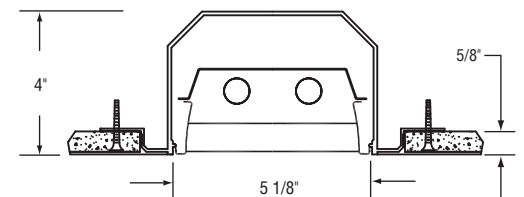

MLR5-2-SF5
Drywall Spackle Flange
Shown with Parabolic Baffle

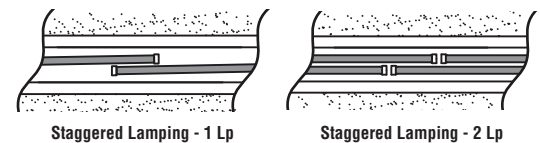

Staggered Lamping - 1 Lp

Staggered Lamping - 2 Lp

Specifications

Housing

Three piece extruded aluminum available in single sections up to 8' long in 2' increments. Standard flange finish is satin white.

Optical Controls

- (PB) 3/4" deep semi-specular aluminum parabolic baffle with blades on 1 1/2" centers
- (PBW) 3/4" deep white aluminum parabolic baffle with blades on 1 1/2" centers
- (LP) Flush clear extruded DR acrylic linear prismatic lens
- (TWA) Flush translucent white extruded DR acrylic lens
- (FC) Flush frosted clear extruded DR acrylic lens

Staggered Lamping

Staggered lamping is standard for all continuous rows. See Microlinea Row Guide section.

Reflectors

Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring

All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Integral Controls


Contact factory for daylight and/or occupancy sensor controls.

Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.

Mountings

- TR = 1/4"-20 Threaded Rod (By others) - (OF)
- YK = Snap-in Yoke - (OF)
- AC = Adjustable Aircraft Cable - (OF)
- TR = 1/4"-20 Threaded Rod (By others) - (SF)
- YK = Adjustable Yoke - (SF)

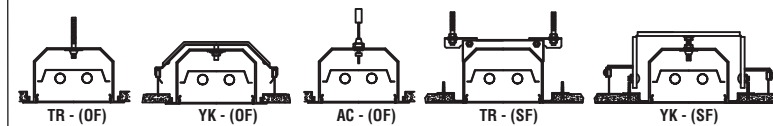

Nominal Length:
See Microlinea Row Guide section for 1 lamp and 2 lamp lengths.

Series
MLR5

MLR5-1-18'-SF5-YK-PB-120-T5-[]

# of Lamps	Ceiling Type/Thickness	Optical Controls	Voltage	Lamp Type	Options
1	OF	PB	120	T5	SS (L/R) (Left/Right) Lamp Row Switching (Common Neutral) (N/A for 2' or 3')
2	Drywall Overlap Flange	Semi-Specular Parabolic Baffle	277	T5HO	EBPH Emergency Battery Pack (975-1325 Lumens) (N/A for 2' or 3')
	SF1	PBW	347		Dim Dimming
	Spackle Flange w/1/2" Drywall	White Parabolic Baffle			FS Fused Ballasts
	SF5	LP			GTD Generator Transfer Device (N/A for 2' or 3')
	Spackle Flange w/5/8" Drywall	Linear Prismatic Lens			CP Chicago Plenum
		TWA			DL Damp Location
		Translucent White Acrylic Lens			
		FC			
		Frosted Clear Lens			
					EMCKT Emergency Circuit (Separate Hot & Neutral) (N/A for 2' or 3')
					EBPL Emergency Battery Pack (635-700 Lumens) (N/A for 2' or 3')

