


Paladia

Bare Cove Perimeter Series

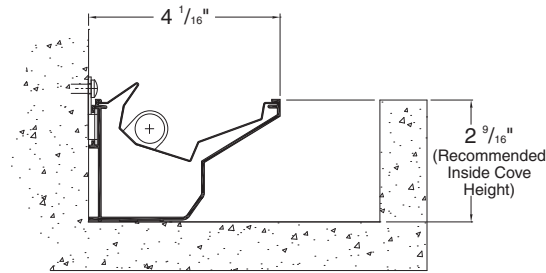

Catalog Number	Type
Project Name	

PPBC01

**Indirect Cove Mount
without Fascia
(T8, T5 or T5HO Lamps)**

S P E C I F I C A T I O N S

Housing

Constructed of one-piece 0.060 thick extruded aluminum finished in baked white enamel. Standard lengths are available up to 12' 0" in one continuous section.

Mounting

Fixtures may be wall mounted utilizing adjustable mounting clips provided or directly to bottom of cove through factory drilled mounting holes.

Reflector

Precisely formed from .023" semi-specular aluminum with grain running perpendicular to length of reflector.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Controls

Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

Certification

All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.

Series
PPBC01

Nominal Lengths:
4', 8' and 12'

Fixture Lengths		
	T5 Lamps	T8 Lamps
Nominal Length	Actual Length	Actual Length
4' 0"	3' 10"	4' 0"
8' 0"	7' 8"	8' 0"
12' 0"	11' 6"	12' 0"

P P B C 0 1 - 8 - V - T 5 - []

Voltage

120
277
347

Lamp Type

T5
T5HO
T8

Options

NLCKT
Separate Night Light Circuit
EMCKT
Separate Emergency Circuit

EBPL
Emergency Battery Pack
(635-700 Lumens)

EBPH
Emergency Battery Pack
(975-1325 Lumens)

Dim
Dimming

FS
Fused Ballasts

GTD
Generator Transfer Device

DC
Clear Extruded 100% DR
Acrylic Dust Cover



