


Trilinea Series™

Catalog Number	Type
Project Name	

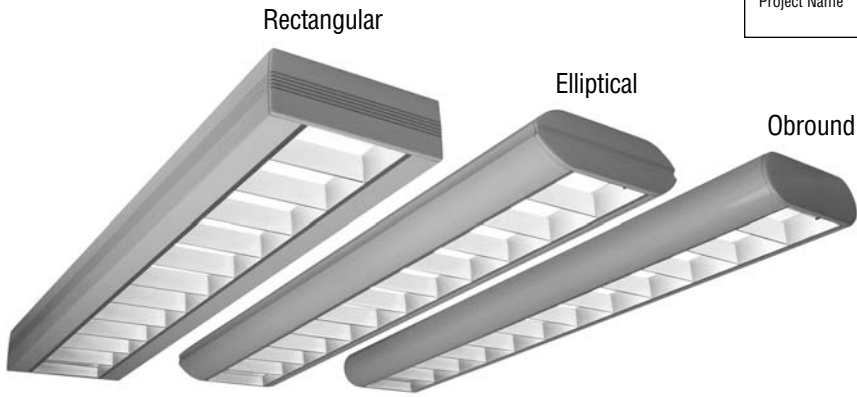

TRS03-T5

Indirect/Direct & Direct
(T5 or T5HO Lamps)

S P E C I F I C A T I O N S

Housing

Two-piece .080" thick extruded aluminum. Die-cast aluminum end plates are secured with no visible fasteners. Standard lengths are 4', 8' and 12'. Provisions may be made for patterns and continuous rows of any length.

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability. Standard finish for stems and canopies is white.

Indirect Optical Controls

- (OP) Open top 75%↑ 25%↓
- (TP4) Transmittive optical panel 55%↑ 45%↓
- (SP) Solid aluminum panel 0%↑ 100%↓

Direct Optical Controls

- (PB4) 1 1/2" deep semi-specular aluminum parabolic baffle with blades on 4" centers
- (PB3) 1 1/2" deep semi-specular aluminum parabolic baffle with blades on 3" centers
- (PBW) 1 1/2" deep white aluminum parabolic baffle with blades on 4" centers

Reflectors

Die-formed from .020" thick high reflectance specular aluminum.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Wiring


All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

Controls


Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

Certification


All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.

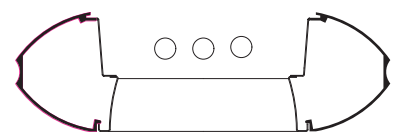

TRS03-E
11" x 3 1/2"

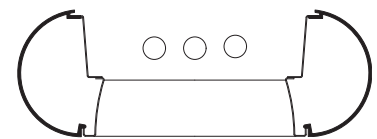

TRS03-O
9 3/4" x 3 1/2"



TRS03-R
9 3/4" x 3 1/2"

Series
TRS03

Standard Lengths:
4', 8' and 12'

Mounting
 CT = Cable (15/16" Tbar) Fully Adjustable (36" Standard)
 CN = Cable (Non-Tbar) Fully Adjustable (36" Standard)
 P = Rigid Stem (Up to 48" Standard)
 K = Swivel Stem (Up to 48" Standard)
 J = Ceiling (With "SP" Optical Control only)

TRS03-0-12-CT-OP/PB4-F01M-V-T5HO-[]

Housing Style	Indirect Optical Controls	Direct Optical Controls	Standard Finishes	Voltage	Lamp Type	Options
E Elliptical	OP 75%↑ 25%↓	PB4 (4" O.C.) Semi-Specular Parabolic Baffle	F01M Matte White Premium Finishes F01G Gloss White	120	T5	SS-I/O (Inboard/Outboard) Lamp Row Switching (Common Neutral Utilized)
O Obround	TP4 55%↑ 45%↓	PB3 (3" O.C.) Semi-Specular Parabolic Baffle	F02 Ivory F03 Stonewash F04 Camel F05 Gray Day F06 Pebble Beach F07 Steel F08 Gray Seal F09 Mocha F10 Bronzed F11 Black F12 Ultrasonic Clear	277 347	T5HO	Dim Dimming FS Fused Ballasts GTD Generator Transfer Device
R Rectangular	SP 0%↑ 100%↓	PBW (4" O.C.) White Parabolic Baffle	F13 Merlot F14 Red Skies F15 Lemon F16 Forest Hunter F17 Olive F18 Khaki F19 Heather Green F20 Blue Print F21 Reflex Blue F22 Navy FCC Custom Color			DLCKT Separate Night Light Circuit EMCKT Separate Emergency Circuit EBPL Emergency Battery Pack (635-700 Lumens) EBPH Emergency Battery Pack (975-1325 Lumens) DC Clear Extruded 100% DR Acrylic Dust Cover (N/A for T5HO) AO Translucent White Acrylic Overlay



