

AS350 SERIES

PAL
ARCHITECTURAL

One-piece 0.08" thick extruded aluminum in standard lengths of 2', 3', 4', 6' and 8' with provisions for any length. Die cast aluminum flat end caps finished to match fixture housing and secured with no visible fasteners.

- High efficacy ratings (as high as 124 lumens/watt)
- Multiple mounting options
- Available with 0-10V dimming and Tunable White and RGBW options
- Ideal for applications such as bathrooms, stairwells and healthcare facilities



AS350 VARIATIONS

LED light source available standard for 3000K, 3500K and 4000K CCT, in high and medium light outputs, and 80 or 90 CRI. Standard outputs at 80 CRI:

HO - High Output (DLC Listed)


*874 Total Delivered Lms/Ft at 7 System Watts/Ft

MO - Medium Output (DLC Listed)


*542 Total Delivered Lms/Ft at 4 System Watts/Ft

CO - Custom Output - Contact factory for available output range.


DISTRIBUTION CURVES

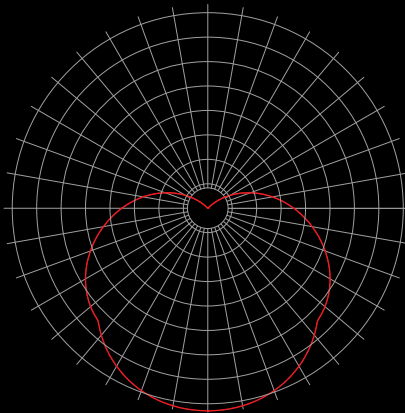


Diamond Ceiling or
Cable Mount

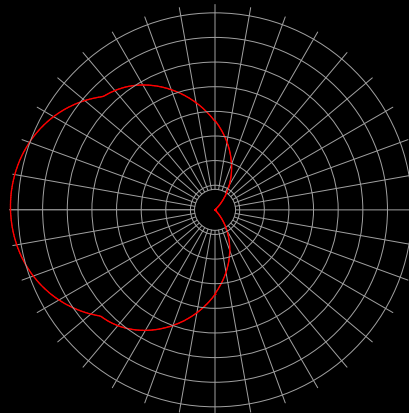

Diamond Wall Mount

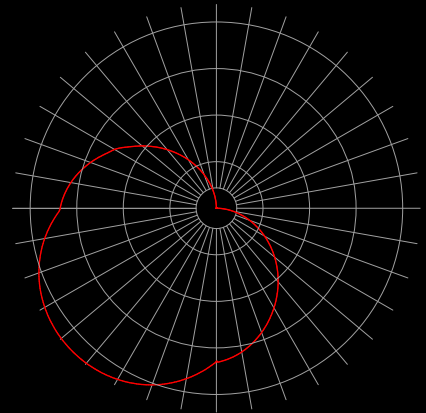



Wall or Flush Wall
Mount

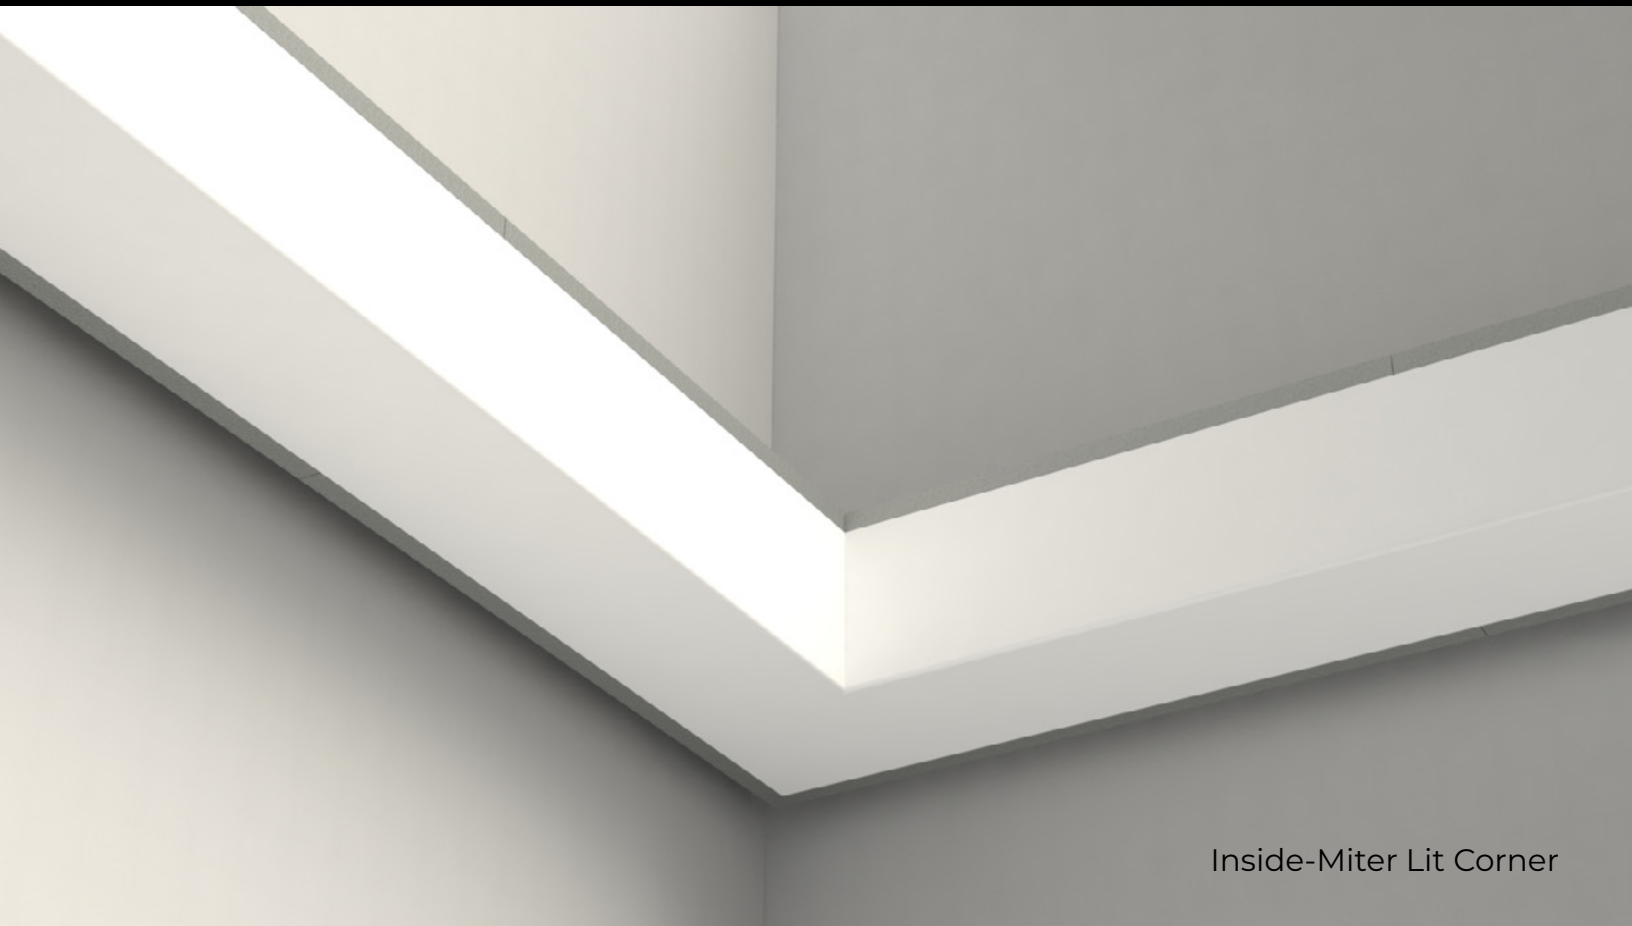



Inside-Miter Lit Corner

AS350 SERIES



DIAMOND CEILING

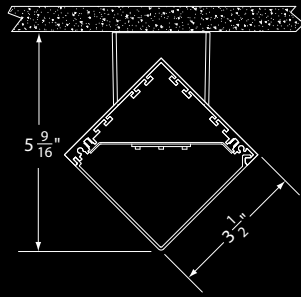


WALL MOUNT

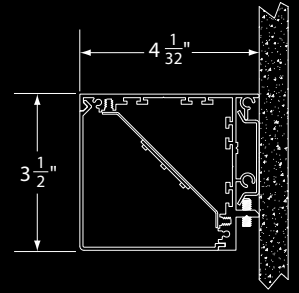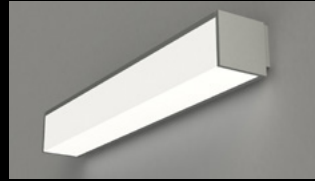


CEILING FLUSH

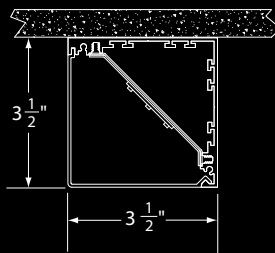


FLUSH WALL

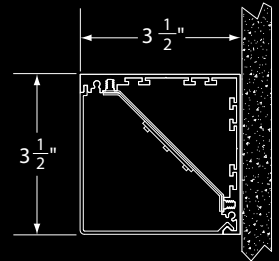

DIAMOND WALL

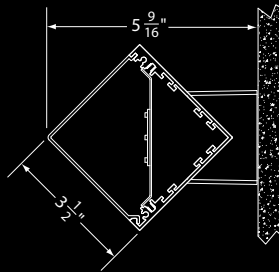

CABLE MOUNT

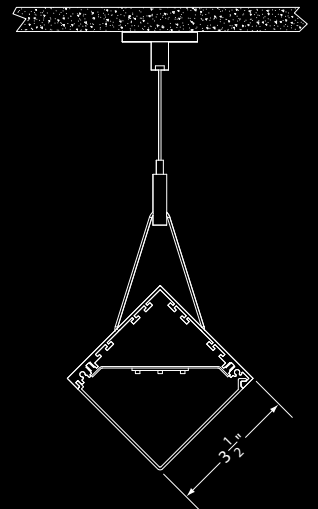

4830 Timber Creek Drive,
Houston, TX 77017
P: 713.946.4343
F: 713.946.4441
www.pal-lighting.com

PAL
ARCHITECTURAL