

A photograph of a modern interior space, likely a lobby or atrium. The ceiling is composed of numerous thin, horizontal wooden slats, with recessed rectangular lighting fixtures. Large windows on the walls offer a view of greenery outside. In the foreground, there are glass doors and two potted plants in red containers. A central white pillar is visible. The text 'PAL' is overlaid in large, bold, black letters, with a 'TM' symbol to the right of the 'L'.

PAL™

ARCHITECTURAL

DESIGNER SERIES

Qty:	Type:
Project Name:	
Catalog Number:	

ORDERING GUIDE

	—		—		—		—		—
--	---	--	---	--	---	--	---	--	---

Series	Outputs	Color Temp. (CCT)	Color Render	Fixture Length	Ceiling Type - (Recessed)
MLR2	Microlinea Recessed Series 2	Series 2 Outputs	Series 3 Outputs		
MLR3	Microlinea Recessed Series 3	HO - 746 Lms/Ft MO-463 Lms/Ft	HO - 677 Lms/Ft MO - 463 Lms/Ft		
MLS2-D	Microlinea Suspended Series 2 - Direct	Series 2 I/D			
MLS3-D	Microlinea Suspended Series 3 - Direct	HO/HO - 6911 (Total) MO/MO - 4722 (Total)			
MLS2-I/D	Microlinea Suspended Series 2 - Indirect/direct	Series 3 I/D			
MLS3-I/D	Microlinea Suspended Series 3 - Indirect/Direct	HO/HO - 6737 (Total) MO/MO - 4283 (Total)			

	—		—		—
--	---	--	---	--	---

Mountings	Lens - Indirect (Suspended)	Lens - Direct (All Fixture Types)	Finish - (Suspend & Ceiling)
-----------	-----------------------------	-----------------------------------	------------------------------


RECESSED MOUNT	FDC Frosted Acrylic Dust Cover - (Snap-in)	LOH LED Optimized Acrylic Snap-in Lens - (Standard Distribution)	F01M Matte White (Standard)
Blank Leave blank if Grid ceiling type	Blank Leave blank if Direct-Only fixture		Blank Leave blank if Recessed fixture

SUSPENDED MOUNT - DIRECT & INDIRECT/DIRECT
CN Adjustable Cable Assy (Non Tbar) - 36" Standard

CEILING MOUNT
J Ceiling Mount (Flush)

	—		—	
--	---	--	---	--

Voltage	Drivers - Dimming ^{2,3}	Emergency & Rating Options
120 120V	DIM0 Dimming 100% to 0%	EBPHST Emergency Battery Pack - 10 Watt ⁴
277 277V	DIM1 Dimming 100% to 1%	Self-Testing. (Integral Mount)
UNV Universal Voltage (120V thru 277V)	DIM5 Dimming 100% to 5%	CP Chicago Plenum Listing (Recessed)
	DIM10 Dimming 100% to 10%	

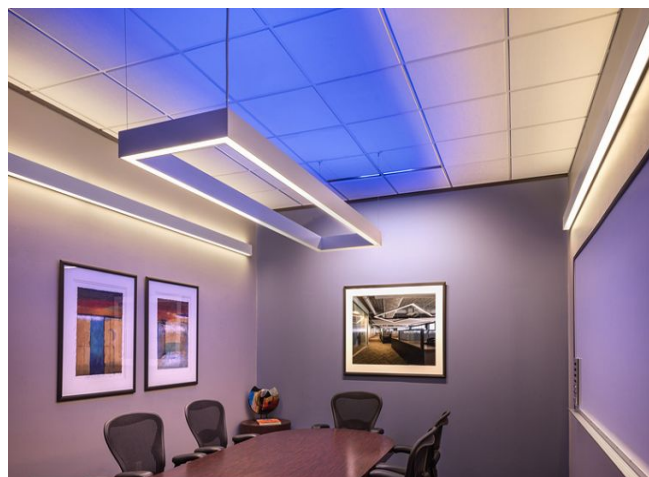

DESIGNER SERIES SHIPS IN 20 DAYS

Fixture Notes:

- All fixtures are factory pre-wired for a single circuit.
- Unless otherwise requested, all fixtures contain integral-mount "power-on-board" drivers.
- Standard power supply (driver) is UL/CUL recognized, and available with 0-10V dimming capability & 120 - 277 universal voltage.
- Standard emergency battery pack is a 10 Watt constant power, self-testing, UL 924 listed pack from Iota Engineering - providing 1000 lumens of light for approximately 90 minutes. Battery packs are integral mounted.


Designer Series Policy Notes:

- Orders will ship within 20 shipping days. Ship dates do not include nationally recognized holidays. Orders received after 12:00 p.m. CST shall be dated as received on the following business day.
- Ship dates are contingent upon receipt of released, approved purchase order from a distributor with approved credit.
- Freight is allowed on shipments of \$7,500 or more to any one destination within the continental United States. Freight is allowed on shipments of \$10,000 or more to any one destination within Canada.
- Orders ship via standard motor freight. Any special or expedited shipping will require an additional surcharge.
- For more information, contact specs@pallighting.com.
- For orders of 250' or more, contact specs@pallighting.com.

Designer Series - Microlinea Series 2


Standard Fixture Lengths and Mounting Centers

Recessed Mount Configurations

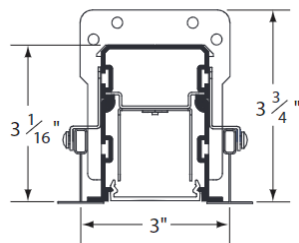


MLR2 - GRID CEILING FLUSH
TILE, REGULAR TILE &
SCREW SLOT

NOMINAL LENGTH SERIES 2	FIXTURE LGTH. - INCLUDES BLANK ENDS - DIM 'B' SERIES 2
4'	47 - 13/16"
8'	95 - 11/16"

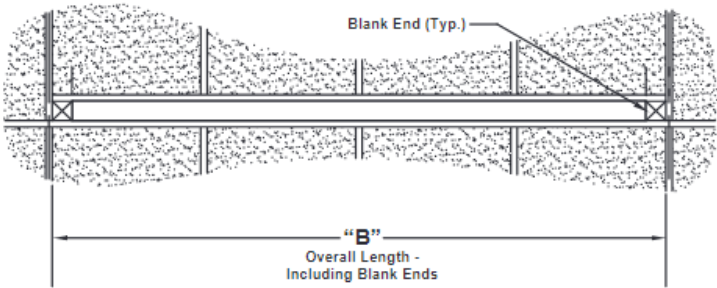


Suspended Mount Configurations

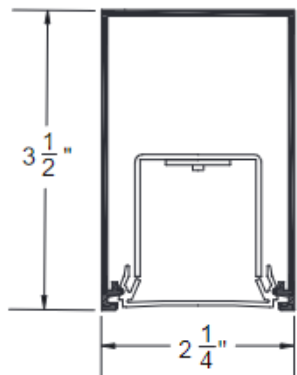

MLS2-Direct
Suspended/Ceiling Mount

MLS2 - DIRECT

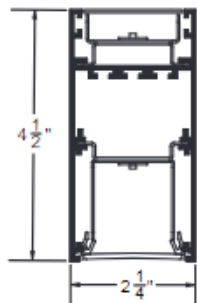


MLS2-I/D-HO/HO-FDC/LOH
MLS2-I/D-MO/MO-FDC/LOH
Shown with optional Frosted Dust Cover

MLS2 - INDIRECT/DIRECT


Designer Series - Microlinea Series 3

Standard Fixture Lengths and Mounting Centers





Recessed Mount Configurations

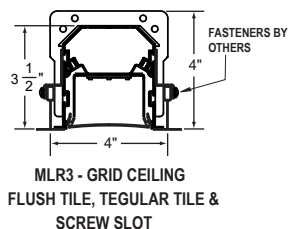

NOMINAL LENGTH SERIES 3	FIXTURE LGTH. - INCLUDES BLANK ENDS - DIM 'B' SERIES 3	T-BAR CENTERS SERIES 3
4'	46 - 13/16"	48"
8'	93 - 5/8"	96"



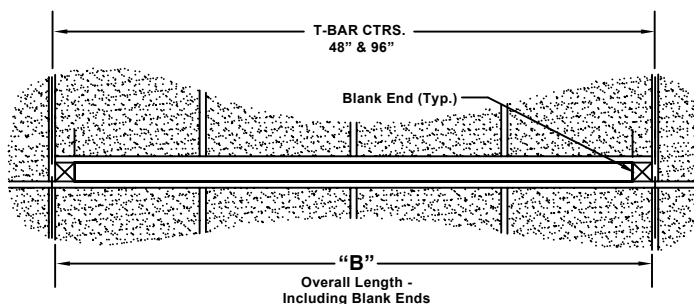


Suspended Mount Configurations

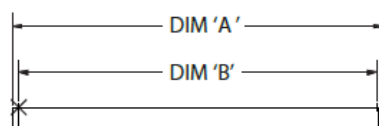

NOMINAL LENGTH SERIES 3	OVERALL FIXTURE LENGTH - DIM 'A' SERIES 3	MTG. CTRS. - DIRECT - DIM 'B' SERIES 3	MTG. CTRS. - INDIRECT/DIRECT - DIM 'B' SERIES 3
4'	48 - 13/16"	46 - 1/16"	46 - 13/16"
8'	95 - 5/8"	92 - 7/8"	93 - 5/8"

Ceiling Mount Configurations

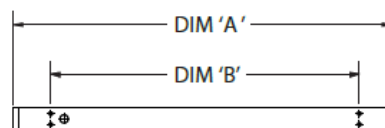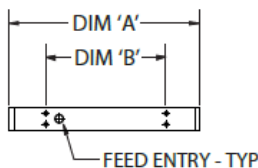

NOMINAL LENGTH SERIES 3	OVERALL FIXTURE LENGTH DIM 'A' SERIES 3	MOUNTING CENTERS DIM 'B' SERIES 3
4'	48 - 13/16"	30 - 13/16"
8'	95 - 5/8"	77 - 5/8"