
Microlinea Series 2, 3 & 5

C

A T

Unlit Connector Specifications



Microlinea Series 2

Direct only 2 1/4" w x 2 1/4" h fixtures Indirect/Direct 2 1/4" w x 4 1/2" h fixtures

Connector

With Direct Fixtures: 2 1/4" high one piece Construction:


.070" thick extruded aluminum with removeable cover plate for easy access.

With Indirect/Direct Fixtures: 4 1/2" high one piece .070" thick extruded aluminum with removable

cover plate for easy access.

Finish: Standard and premium finishes are baked powder

coat electrostatically applied (2.0 mil. minimum thickness) to assure aesthetics and durability.



Microlinea Series 3

3 1/8" w x 3 1/2" h fixtures Direct only Indirect/Direct 3 1/8" w x 5" h fixtures

Connector

With Direct Fixtures: 3 1/2" high one piece Construction: .090" thick extruded aluminum with removeable


cover plate for easy access.

With Indirect/Direct Fixtures: 5" high one piece .090" thick extruded aluminum with removable

cover plate for easy access.

Standard and premium finishes are baked powder Finish: coat electrostatically applied (2.0 mil. minimum

thickness) to assure aesthetics and durability.



Microlinea Series 5

Direct only 5 1/4" w x 3 11/16" h fixtures Indirect/Direct 5 1/4" w x 5 3/8" h fixtures

Connector

Construction:

With Direct Fixtures: 3 11/16" high one piece .090" thick extruded aluminum with removeable

cover plate for easy access.

With Indirect/Direct Fixtures: 5 3/8" high one piece .090" thick extruded aluminum with removable

cover plate for easy access.

Finish:

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil. minimum thickness) to assure aesthetics and durability.


R R

Standard connectors are 2-way (90° corner),

3-way "T", and 4-way "X".

Catalog Logic

All connectors should be specified and ordered as follows:

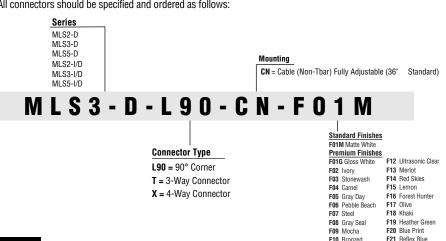



F11G Gloss Black F11M Matte Black

FCC Custom Color