


**PAL**  
ARCHITECTURAL

MICROLINEA™  
SERIES 2








## FEATURES

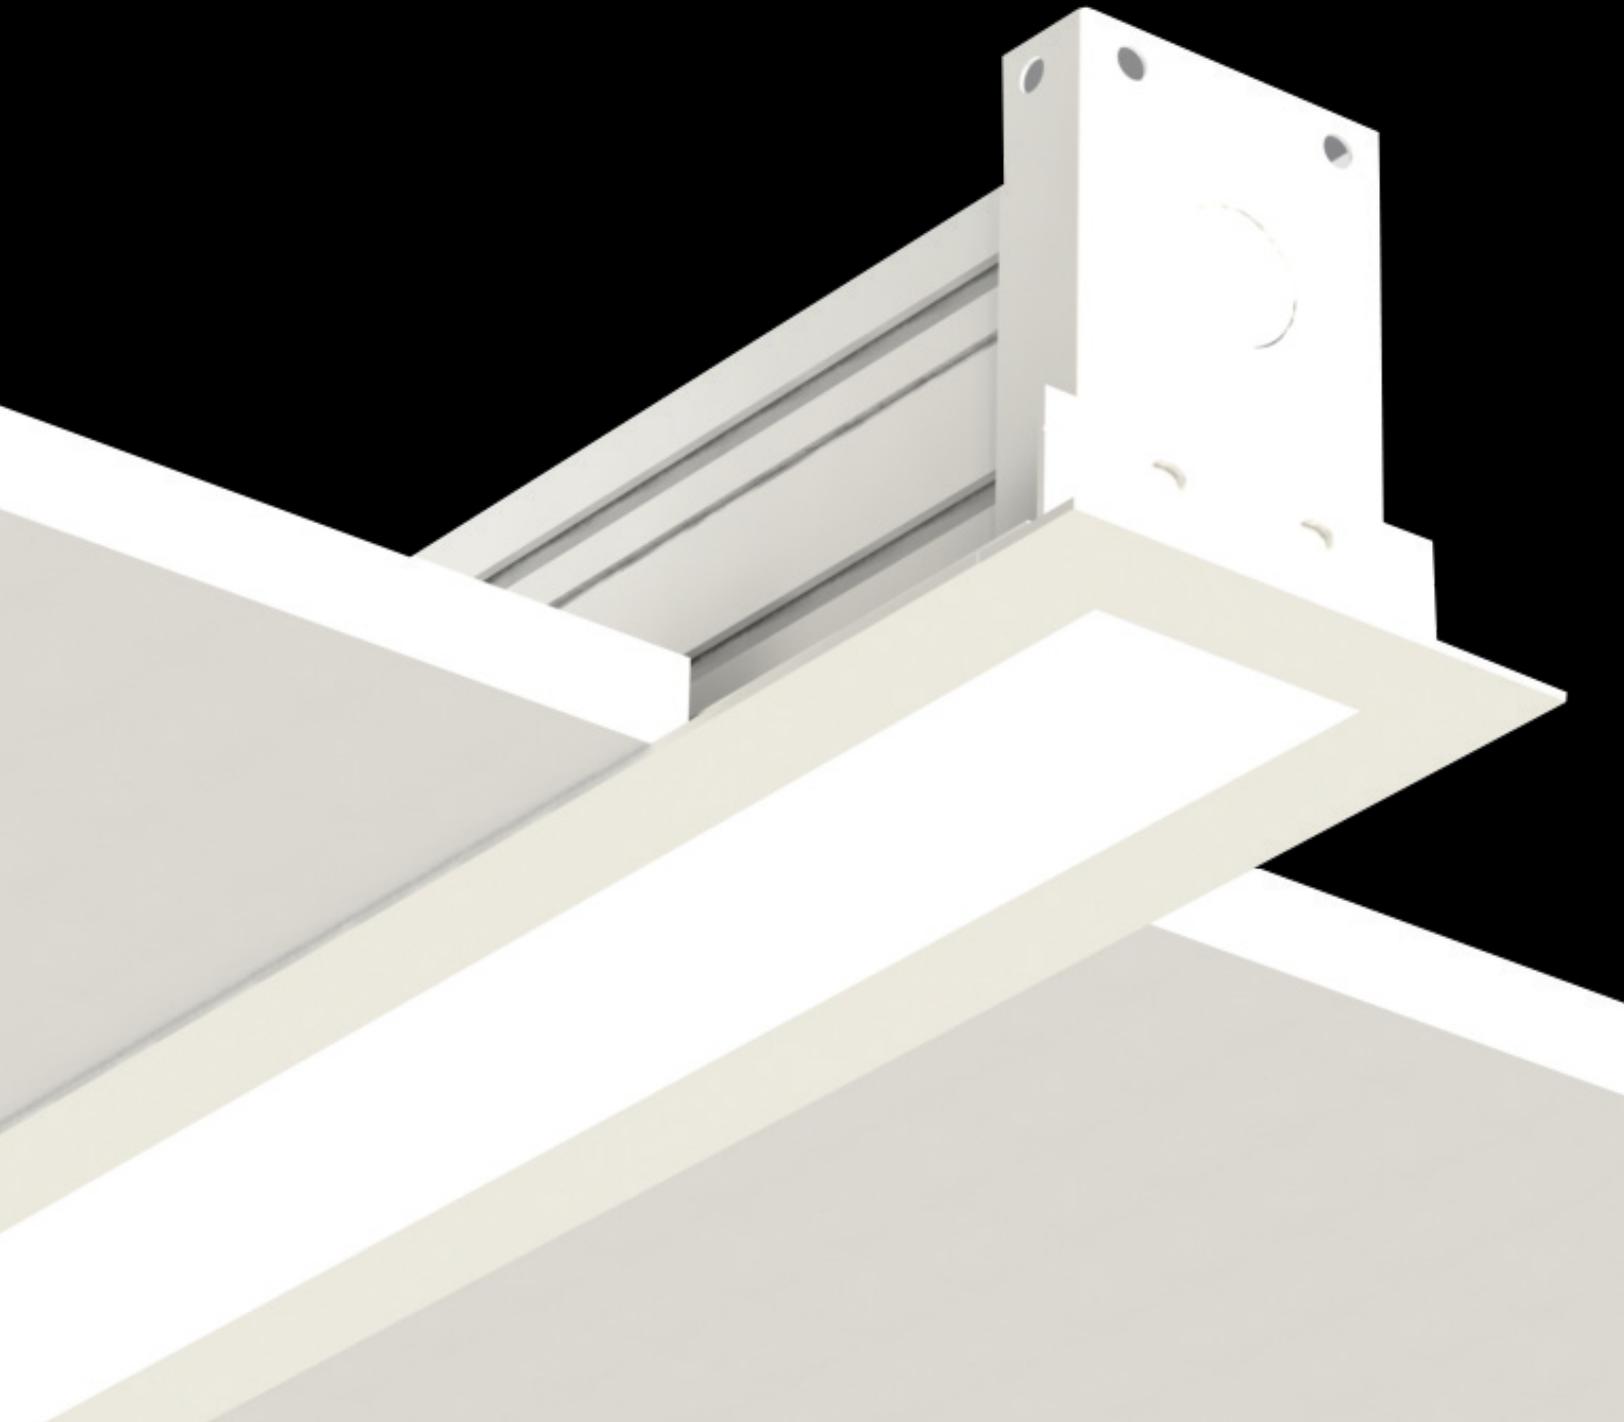


- Efficiencies as high as 116 Lumens/Watt at 1320Lm/ft
- Louver lens options available (left)
- Four lens options and three louver options available
- Wide spread indirect optic for high performance and great lighting efficacies (up to 140 lumens/watt).
- Available in Tunable White and RGBW options, and DMX and Dali protocols





Series/Mounting	Distributions (Flush Lenses)	Standard Outputs	Delivered Lumens/Ft	Efficacies
MLS2-Direct Suspended MLS2-Direct Ceiling		HO - High Output MO - Medium Output	676 Lms/Ft 463 Lms/Ft	96 Lms/W 99 Lms/W
MLS2-Indirect/Direct Suspended		HO/HO - High Output (Up and Down) MO/MO - Medium Output (Up and Down)	1664 Lms/Ft 1137 Lms/Ft	120 Lms/W 123 Lms/W
MLS2-Indirect Suspended		HO - High Output MO - Medium Output	885 Lms/Ft 600 Lms/Ft	128 Lms/W 130 Lms/W
MLS2-Direct Recessed		HO - High Output MO - Medium Output	676 Lms/Ft 463 Lms/Ft	96 Lms/W 99 Lms/W
MLS2-Direct Wall		HO - High Output MO - Medium Output	676 Lms/Ft 463 Lms/Ft	96 Lms/W 99 Lms/W
MLS2-Indirect- Asymmetric Wall		HO - High Output MO - Medium Output	944 Lms/Ft 644 Lms/Ft	136 Lms/W 139 Lms/W
MLS2-Indirect- Asymmetric/Direct Wall		HO/HO - High Output (Up and Down) MO/MO - Medium Output (Up and Down)	1694 Lms/Ft 1124 Lms/Ft	81 Lms/W 90 Lms/W



# MICROLINEA SERIES 2





CEILING MOUNT





RECESSED





CABLE DIRECT





CABLE INDIRECT/DIRECT





CABLE INDIRECT




WALL DIRECT



WALL INDIRECT/DIRECT



WALL INDIRECT



4830 Timber Creek Drive,  
Houston, TX 77017  
P: 713.946.4343  
F: 713.946.4441  
www.pal-lighting.com

**PAL**  
ARCHITECTURAL