


Microlinea Recessed Series 3

(Nominal 3" Luminous Aperture)

Catalog Number	Type
Project Name	

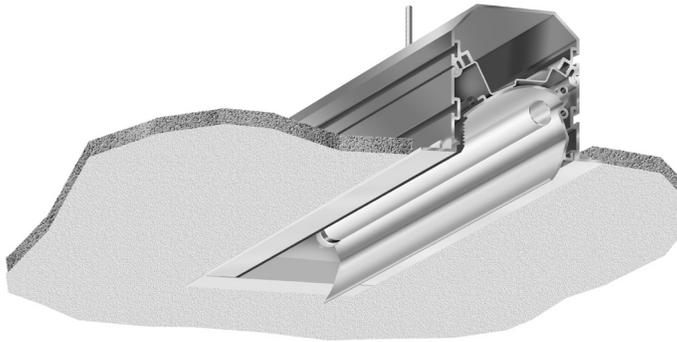

Asymmetric Wall Wash Drywall Overlap Flange (T5 or T5HO Lamps)

S P E C I F I C A T I O N S

Housing

Three piece extruded aluminum with single length sections of 2' or 4'. Consult factory for row lengths longer than 4'.

Optical Controls

- Open
- (CAE) Clear Acrylic Enclosure (Snap-in)

Reflector

Three piece extruded aluminum assembly. Upper and lamp side extrusions are specular. Wall side extrusion is baked "flat black" powder coat to minimize glare to room side.

Ballast



Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Circuitry

All fixtures are factory pre-wired for a single circuit.

Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.



Shown with optional Clear Acrylic Enclosure (CAE)

Standard Lengths:
2 = 2'
4 = 4'

Consult factory for row lengths longer than 4'.

Mountings
TR = 1/4-20 Threaded Rod (By others)
YK = Snap-in Yoke
AC = Adjustable Aircraft Cable

MLR3WW-4-OF-YK-120-T5-[]

Ceiling Type	Voltage	Lamp Type	Options
OF Drywall Overlap Flange	120 277 347	T5 T5HO	EBPL Emergency Battery Pack (635-700 Lumens) (N/A for 2' or 3') EBPH Emergency Battery Pack (975-1325 Lumens) (N/A for 2' or 3') CAE Clear Acrylic Enclosure
			Dim Dimming FS Fused Ballasts GTD Generator Transfer Device (4' only) CP Chicago Plenum

