


# Microlinea Recessed Series 3 (Nominal 3" Luminous Aperture)

Catalog Number	Type
Project Name	

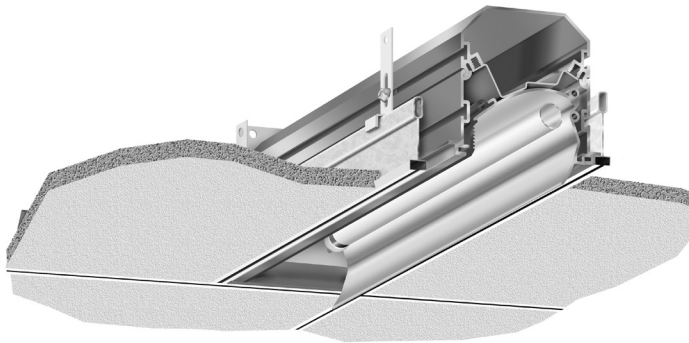

## Asymmetric Wall Wash Screw Slot Grid (T5 or T5HO Lamps)

### S P E C I F I C A T I O N S

#### Housing

Three piece extruded aluminum with single length sections of 2' or 4'. Consult factory for row lengths longer than 4'.

#### Optical Controls

- Open
- (CAE) Clear Acrylic Enclosure (Snap-in)

#### Reflector

Three piece extruded aluminum assembly. Upper and lamp side extrusions are specular. Wall side extrusion is baked "flat black" powder coat to minimize glare to room side.

#### Ballast


Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

#### Circuitry


All fixtures are factory pre-wired for a single circuit.

#### Certification


All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.



MLR3WW-SG



Shown with optional Clear Acrylic Enclosure (CAE)

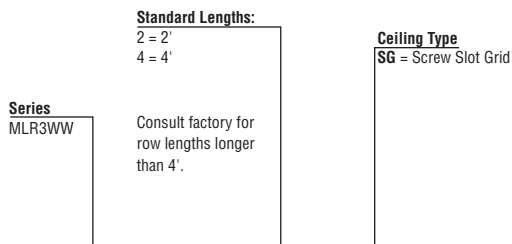

### MLR3WW-4-SG-120-T5-[ ]

**Voltage**  
120  
277  
347

**Lamp Type**  
T5  
T5HO

#### Options

**EBPL**  
Emergency Battery Pack  
(635-700 Lumens)  
(N/A for 2' or 3')

**EBPH**  
Emergency Battery Pack  
(975-1325 Lumens)  
(N/A for 2' or 3')

**CAE**  
Clear Acrylic Enclosure

**Dim**  
Dimming

**FS**  
Fused Ballasts

**GTD**  
Generator Transfer  
Device  
(4' only)

**CP**  
Chicago Plenum

