

# Microlinea Recessed Series 3

## (3 1/8" Luminous Aperture)



Catalog Number	Type
Project Name	

## Lighted Horizontal Corners

### (T5 or T5HO Lamps)

Horizontal extruded aluminum 90° corners are available for use when ceiling mounted patterns are desired. Corners are available for 1 lamp or 2 lamp, T5 or T5HO lamps. Lamps are arranged in the corner to insure uniform illumination.

See reverse for dimensions.

### S P E C I F I C A T I O N S

#### Housing

Three piece extruded aluminum, mitered and secured together to form a nominal 2' x 2' continuously lit 90° corner.

#### Optical Controls

(Lenses mitered to provide a continuous transition through the corner.)

- (LP) Clear extruded DR acrylic linear prismatic lens
- (TWA) Translucent white extruded DR acrylic lens
- (FC) Frosted clear extruded DR acrylic lens

#### Staggered Lamping

Staggered lamping is standard.

#### Reflectors

Die-formed from .020" thick aluminum and finished with a high reflectance white enamel.

#### Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

#### Circuitry

All corner assemblies are factory pre-wired for a single circuit.

#### Wiring

All corner assemblies are provided with factory installed quick-connect wiring.

#### Certification

All corner assemblies are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.


### H O W T O O R D E R

<p><b>Series</b> MLR3</p>	<p><b>Corner Type</b> HL90 = 90° L (Horizontal)</p>	<p><b>Mountings</b> YK = Adjustable Yoke - SF1 and SF5 only YK = Snap-in Yoke - OF only TR = OF and SF only AC = OF only XX = FT, TT and SG</p>	<h2>MLR3-2-HL90-OF-YK-TWA-120-T5-[ ]</h2>			
<p><b># of Lamps</b> 1 2</p>	<p><b>Ceiling Type</b> FT = 15/16" or 9/16" Grid with Flush Tile TT = 15/16" or 9/16" Grid with Tegular Tile SG = Screw Slot Grid OF = Drywall Overlap Flange SF1 = Spackle Flange w 1/2" Drywall SF5 = Spackle Flange w 5/8" Drywall</p>	<p><b>Optical Controls</b> LP Linear Prismatic Lens TWA Translucent White Acrylic Lens FC Frosted Clear Lens</p>	<p><b>Voltage</b> 120 277</p>	<p><b>Lamp Type</b> T5 T5HO</p>	<p><b>Options</b> SS(L/R)(Left/Right) Lamp Row Switching (Common Neutral Utilized) (2 Lp Cross Section Only) <b>Dim</b> Dimming <b>FS</b> Fused Ballasts <b>CP</b> Chicago Plenum</p>	




# Microline Recessed Series 3

## Lighted Horizontal Corners

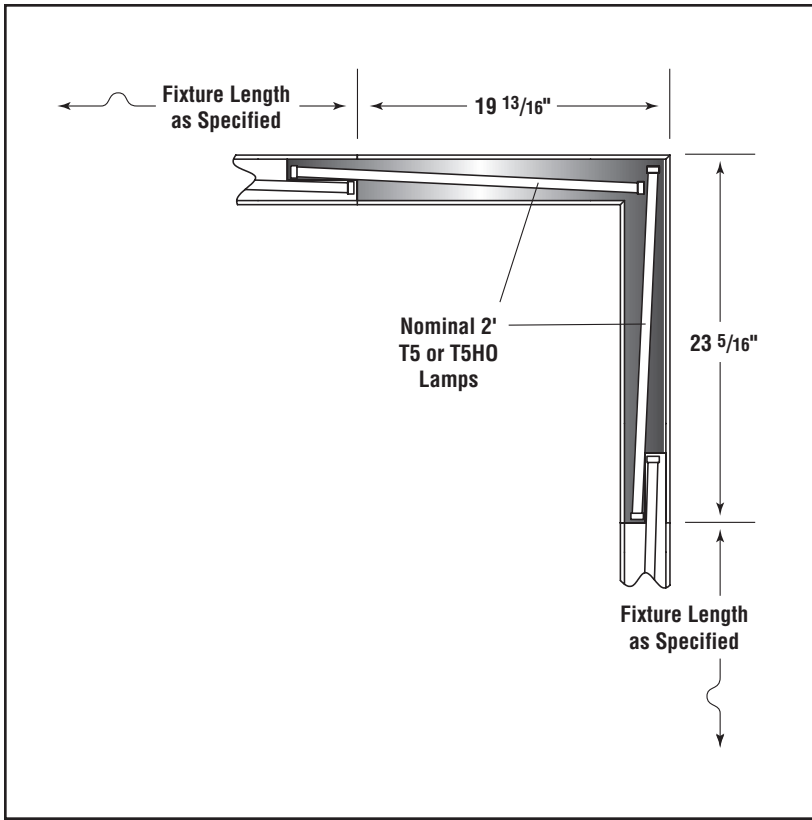

One lamp lighted  
Horizontal Corner

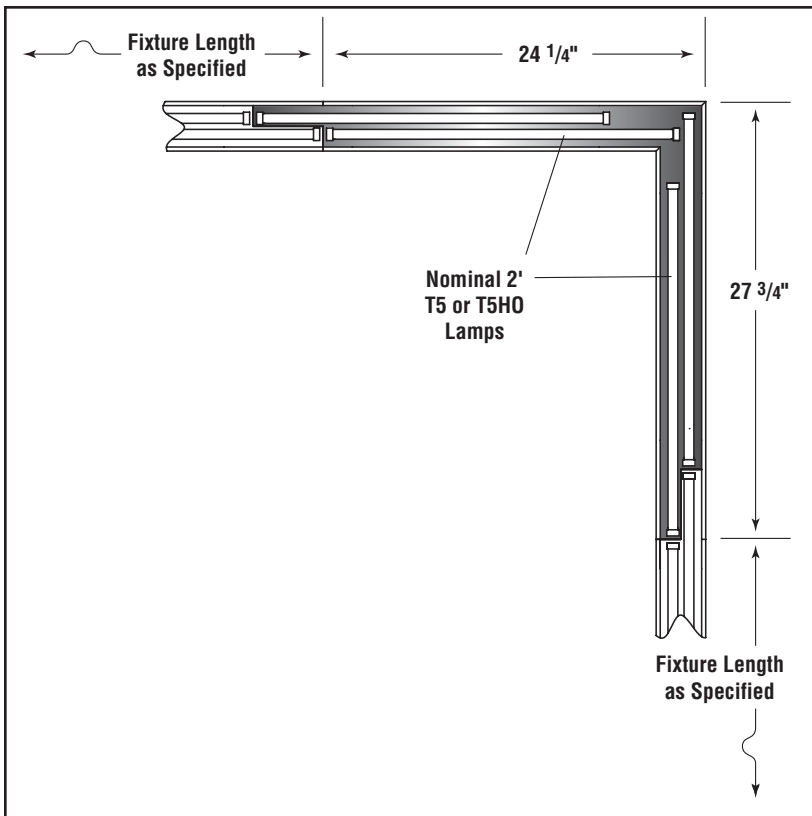

Two lamp lighted  
Horizontal Corner

Consult Factory for exact luminaire placement.



Precision Architectural Lighting 4830 Timber Creek Drive Houston, Texas 77017  
Tel 713.946.4343 Fax 713.946.4441 www.pal-lighting.com