




MICROLINEA™  
SERIES 5  
WET LOCATION

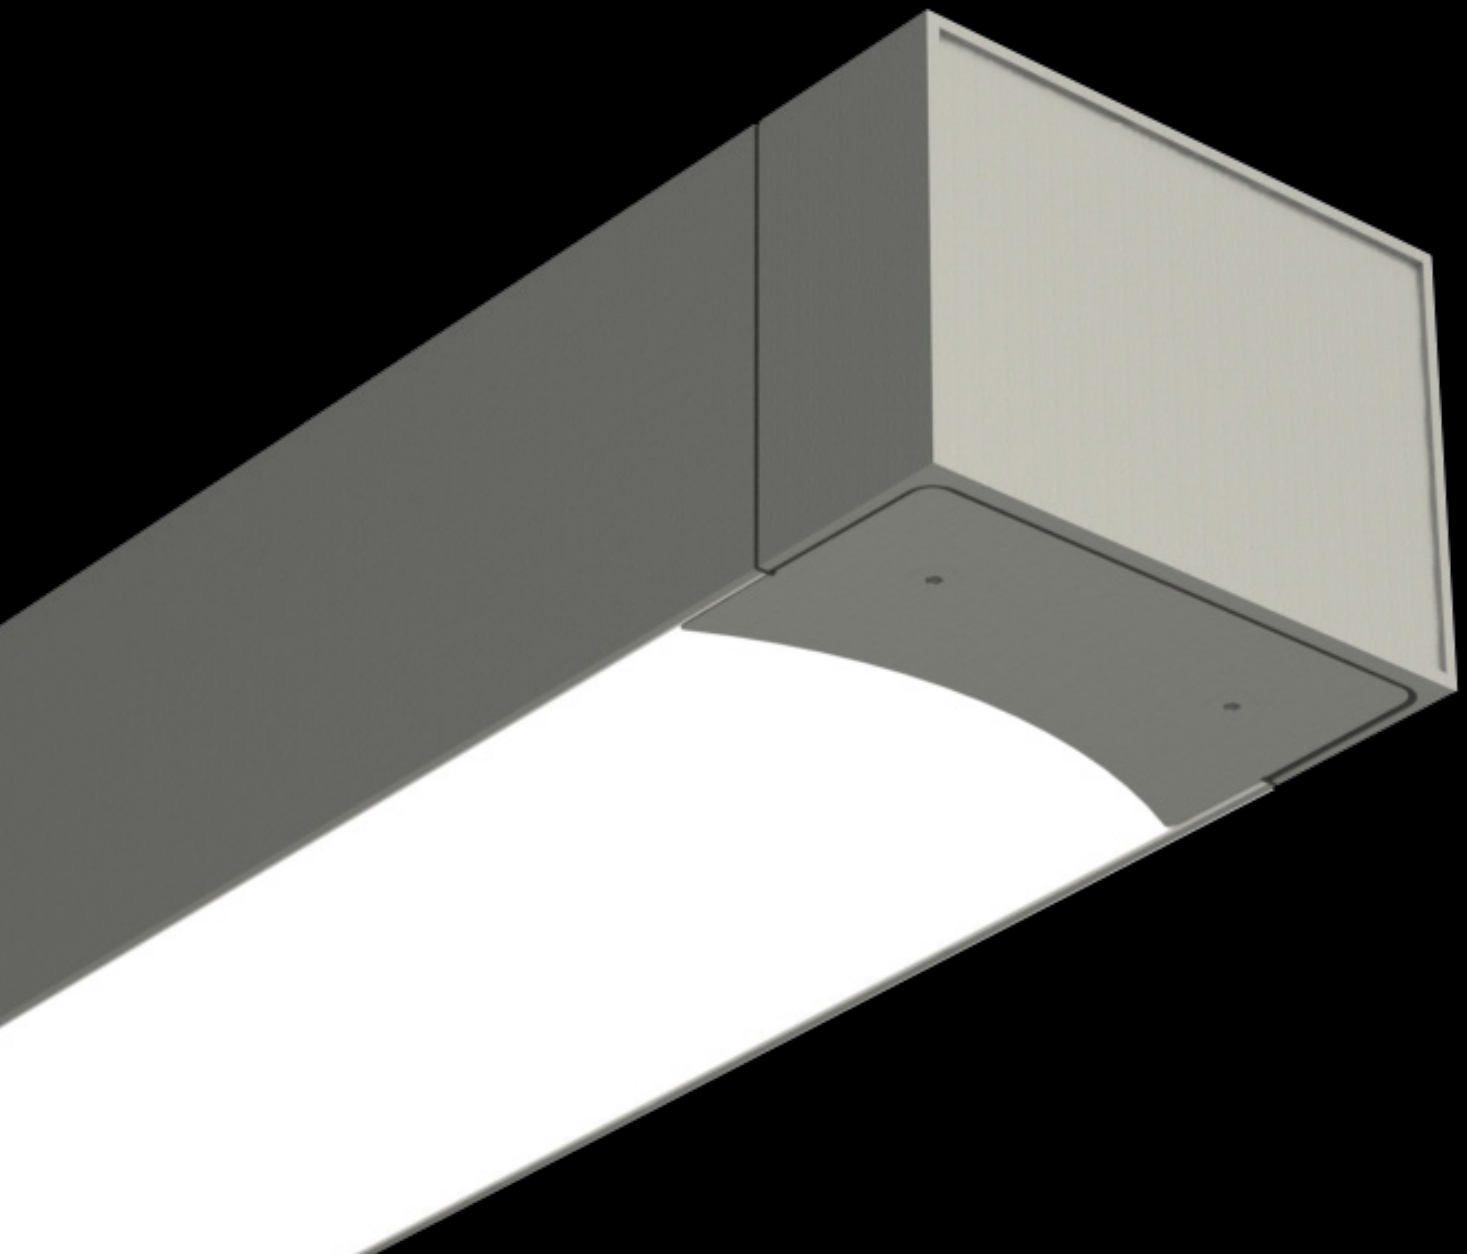

The Microlinea Series 5 Wet Location Series lets you precisely control light in outdoor environments. Combining flexibility with proven ruggedness, the ML5WL65 Series features a variety of exterior mounting options, including Suspended, Ceiling, Recessed and Wall Mount.

- Available in Direct-only and Indirect/Direct configurations
- IP65 rated: Dust tight and protected from water jets from any angle.
- Direct configuration features a full cut-off design, conforming to the principles of the International Dark Skies Association (IDA)
- ML5WL65 also carries an IK10 impact rating.
- Available with factory-programmable LED drivers for custom lumen outputs.



# MICROLINEA SERIES 5

## WET LOCATION




SERIES/ ORIENTATION/ MOUNTING	DISTRIBUTIONS	STANDARD OUTPUTS	DELIVERED	EFFICACIES
ML5WL65- DIRECT-STEM, WALL, CEILING or RECESS MOUNT (IP65 Rated Fixture)		HO = High output	807 Lms/Ft	79 Lms/W
		MO = Medium Output	487 Lms/Ft	87 Lms/W
		CO = Contact Factory		
ML5WL65ASY- DIRECT-STEM, WALL, CEILING or RECESS MOUNT (ASYMMETRIC DISTRIBUTION) (IP65 Rated Fixture)		HO = High output	808 Lms/Ft	93 Lms/W
		MO = Medium Output	575 Lms/Ft	99 Lms/W
		CO = Contact Factory		
ML5WL65- INDIRECT/DIRECT- STEM or WALL MOUNT (IP65 Rated Fixture)		HO/HO = High Output Up / High Output Down	1615 Lms/Ft	96 Lms/W
		HO/MO = High Output Up / Medium Output Down	1302 Lms/Ft	99 Lms/W
		MO/HO = Medium Output Up / High Output Down	1299 Lms/Ft	98 Lms/W
		MO/MO = Medium Output Up / Medium Output Down	984 Lms/Ft	103 Lms/W
		CO/CO = Custom Output Up/Custom Output Down	Contact Factory	





# MICROLINEA SERIES 5



## WET LOCATION

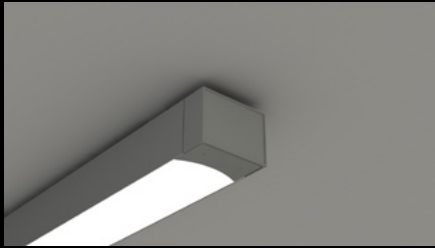



CEILING MOUNT

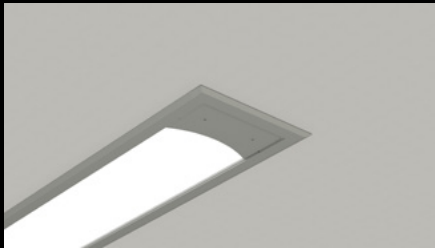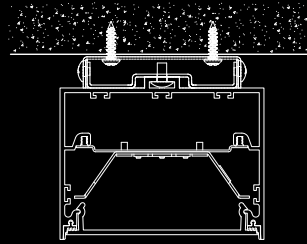


RECESSED MOUNT

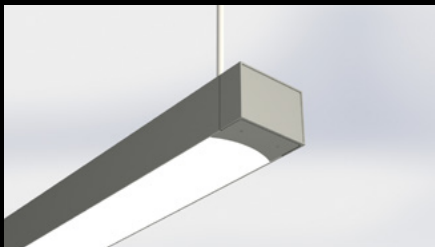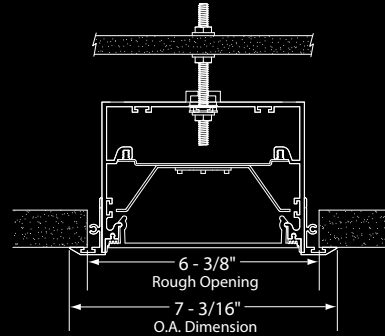

SUSPENDED

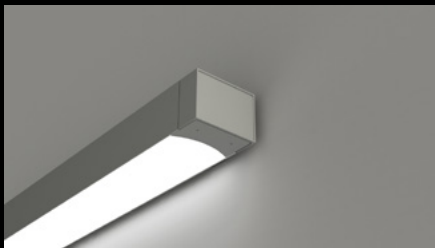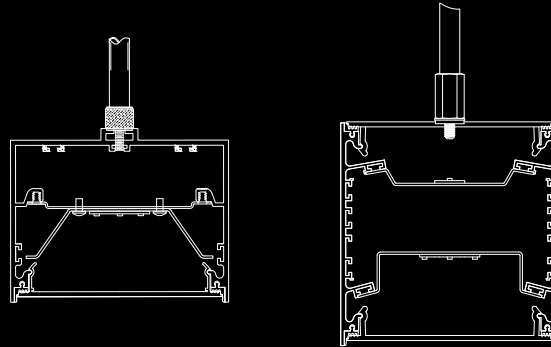

WALL MOUNT

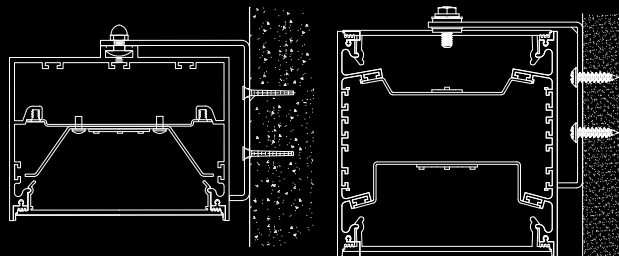

4830 Timber Creek Drive,  
Houston, TX 77017  
P: 713.946.4343  
F: 713.946.4441  
[www.pal-lighting.com](http://www.pal-lighting.com)

**PAL**  
ARCHITECTURAL