



MICROLINEA™ SERIES 2


LED with ACCENT LENS




Precision
Architectural
Lighting

MICROLINEA™ SERIES 2 LED w/ACCENT LENS

SUSPENDED




MLS2-D-HO-AL
MLS2-D-MO-AL




MLS2-I/D-MO/MO-AL/AL
MLS2-I/D-MO/HO-AL/AL
MLS2-I/D-HO/MO-AL/AL
MLS2-I/D-HO/HO-AL/AL

WALL





MLP2-D-HO-AL
MLP2-D-MO-AL

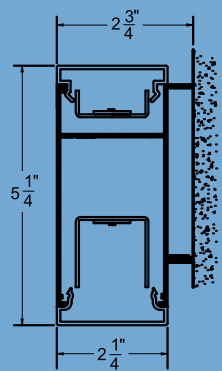

MLP2-I/D-MO/MO-AL/AL
MLP2-I/D-MO/HO-AL/AL
MLP2-I/D-HO/MO-AL/AL
MLP2-I/D-HO/HO-AL/AL

FEATURES:

- Accent lenses extend 3/8" beyond the edge of the fixture housing, adding an element of visual interest to a contemporary shape.
- Available in both direct and indirect/direct configurations, wall mount or suspended.
- Available with efficacies as high as 116 Lumens/Watt

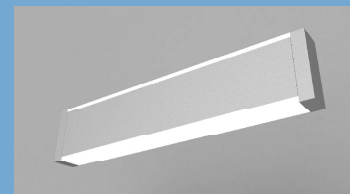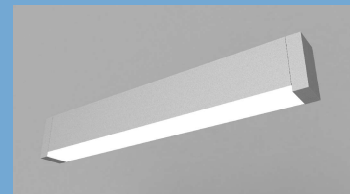

DIRECT ONLY - SUSPENDED & WALL:

Series MLS2-D MLP2-D	Nominal Lengths: 2', 3', 4', 6', 8' and 12' For continuous rows of 12' or longer, specify nominal row length in 1' increments.	Mounting CN = Cable (Non-Tbar) Fully Adjustable (36" Standard) P = Rigid Stem (Up to 48" Standard) K = Swivel Stem (Up to 48" Standard) J = Ceiling W = Wall	Voltage 120 277 347
-----------------------------------	---	--	-------------------------------------

MLS2-D-HO-K40-80-4'-CN-AL-F01M-120-[]

Lumen Output HO - High Output *2713 Total Lumens - 98 Lm/W MO - Medium Output *1853 Total Lumens - 100 Lm/W *Lumen ratings per 4' section (4000 K)	CCT K30 3000 Kelvin K35 3500 Kelvin K40 4000 Kelvin	CRI 80 90	Optical Control AL Accent Lens	Standard Finishes F01M Matte White Premium Finishes F01G Gloss White F02 Ivory F03 Stonewash F04 Camel F05 Gray Day F06 Pebble Beach F07 Steel F08 Gray Seal F09 Mocha F10 Bronzed F11G Gloss Black	F11M Matte Black F12 Ultrasonic Clear F13 Merlot F14 Red Skies F15 Lemon F16 Forest Hunter F20 Blue Print F21 Reflex Blue F22 Navy FCC Custom Color	Options NLCKT Night Light Circuit (Common Neutral) EMCKT Emergency Circuit (Separate Hot & Neutral) EBPL Emergency Battery Pack (6 Watt) *N/A for 2' & 3' EBPH Emergency Battery Pack (10 Watt) *N/A for 2' & 3'	Dim10 Dimming - to 10% Dim1 Dimming - to 1% Dim0 Dimming - to 0% (Dark) FS Fused Drivers GTD Generator Transfer Device DL Damp Location
--	--	------------------------	---	--	---	---	--

INDIRECT/DIRECT - SUSPENDED & WALL:

Series MLP2-I/D MLS2-I/D	CCT K30 3000 Kelvin K35 3500 Kelvin K40 4000 Kelvin	Standard Lengths: 2', 3', 4', 6', 8' and 12' For continuous rows of 12' or longer, specify nominal row length in 1' increments.	Mounting W = Wall CN = Cable (Non-Tbar) Fully Adjustable (36" Standard) P = Rigid Stem (Up to 48" Standard) K = Swivel Stem (Up to 48" Standard)	Voltage 120 277 347
---------------------------------------	--	--	---	-------------------------------------

MLP2-I/D-HO/HO-80-K40-12-W-AL/AL-F01M-V-[]

Lumen Outputs - Indirect & Direct MO/MO -(Med. Output Up/Med. Output Dn.) *4251 Total Lumens/4' - 115 Lm/W MO/HO -(Med. Output Up/High Output Dn.) *5090 Total Lumens/4' - 110 Lm/W HO/MO -(High Output Up/Med. Output Dn.) *5369 Total Lumens/4' - 116 Lm/W HO/HO -(High Output Up/High Output Dn.) *6252 Total Lumens/4' - 113 Lm/W *Lumen ratings per 4' section at 4000 K.	CRI 80 90	Indirect Optical Controls AL Accent Lens	Direct Optical Controls AL Accent Lens	Standard Finishes F01M Matte White Premium Finishes F01G Gloss White F02 Ivory F03 Stonewash F04 Camel F05 Gray Day F06 Pebble Beach F07 Steel F08 Gray Seal F09 Mocha F10 Bronzed F11M Matte Black	F11G Gloss Black F12 Ultrasonic Clear F13 Merlot F14 Red Skies F15 Lemon F16 Forest Hunter F20 Blue Print F21 Reflex Blue F22 Navy FCC Custom Color	Options SS(U/L)(Upper/Lower) LED Row Switching (Common Neutral) NLCKT Night Light Circuit (Common Neutral) EMCKT Emergency Circuit (Separate Hot & Neutral) EBPL Emergency Battery Pack (6 Watt) *N/A for 2' & 3' EBPH Emergency Battery Pack (10 Watt) *N/A for 2' & 3'	Dim10 Dimming - to 10% Dim1 Dimming - to 1% Dim0 Dimming - to 0% (Dark) FS Fused Drivers GTD Generator Transfer Device DL Damp Location
--	------------------------	---	---	--	---	---	--

