

SYSTEM
SOLUTIONS

pp

PALADIA™ PERIMETER LED



Precision
Architectural
Lighting


INTRODUCING

THE PALADIA LED SYSTEM,
AN ADA-COMPLIANT, INDIRECT PERIMETER
SERIES THAT EFFECTIVELY ILLUMINATES YOUR
SPACE WHILE REDUCING CEILING CLUTTER.


pp

PERFORMANCE • QUALITY

LED lighting facts®	
A Program of the U.S. DOE	
Light Output (Lumens)	4277
Watts	40.6
Lumens per Watt (Efficacy)	105
Color Accuracy Color Rendering Index (CRI)	82
Light Color Correlated Color Temperature (CCT)	3974 (Bright White)
Warm White	Bright White
2700K	3000K
4500K	6500K
Daylight	
Warranty**	Yes
<small>All results, except LED lumen maintenance, are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.</small>	
<small>** See www.lightingfacts.com/products for details.</small>	
<small>Registration Number: 1NBP-170152 (4/22/2014) Model Number: PPOX-HD-40K-120 Type: Luminaire - Linear</small>	

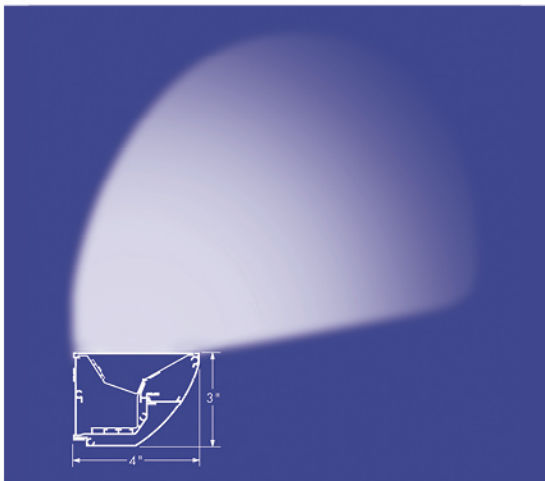

- Efficacies as high as 110 lumens/watt
- Provides 25% more light with 25% less power consumption than comparable T5
- 0-10-volt dimming standard down to 10%, with available dim-to-1% or dim-to-dark capability
- Delivered lumens of 681/foot at medium output, 1,069/foot at high output
- Excellent asymmetric distribution that illuminates without the need for supplemental ceiling fixtures
- Fully programmable drivers allow for customized light output to match your application
- Minimum Color Rendering Index (CRI) of 82

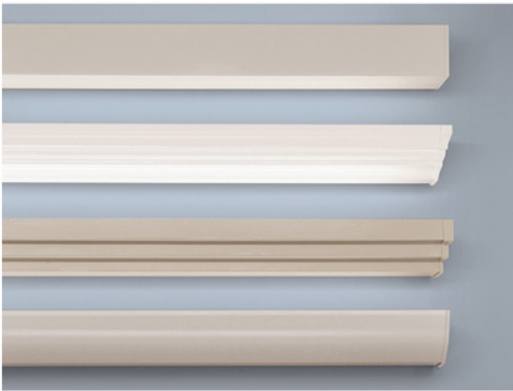

FLEXIBLE SYSTEM SOLUTIONS: FREEDOM TO DESIGN

THE PALADIA LED SYSTEM SOLUTION

IS A FLEXIBLE LIGHTING FAMILY AVAILABLE IN FOUR
FASCIA STYLES TO COMPLEMENT YOUR DESIGNED SPACE.



- *A stylish, glare-free solution offering unlimited runs of virtually any length with fully lit corners, to give you complete design control*
- *The perimeter LED light source that provides a continuous line of unbroken light*
- *Four different fascia -options to complement the style of your space*
- *High-quality extruded aluminum construction and precision die castings ensure the high level of quality you and your customers expect*



**Precision
Architectural
Lighting**

4830 Timber Creek Drive,

Houston, TX 77017

P: 713.946.4343

F: 713.946.4441

www.pal-lighting.com

*A premier manufacturer
of architectural grade
lighting systems,
Precision Architectural
Lighting combines
quality craftsmanship,
outstanding product
performance and
personalized customer
support, partnering with
you to ensure your
complete satisfaction.*

PALADIA™ PERIMETER LED

SPECIFICATIONS

SERIES

PALADIA SERIES LED SQUARE	PPSQ
PALADIA SERIES LED CLASSICAL	PPCL
PALADIA SERIES LED ROUND	PPRD
PALADIA SERIES LED STEPPED	PPST

*Clear .060" Thick Polycarbonate Dust
Cover Included—Standard*

LUMEN OUTPUT

Lumen ratings per 4' section (4000 K)

HIGH OUTPUT	HO
4277 Total Lumens—105 Lm/W	
MEDIUM OUTPUT	MO
2724 Total Lumens—110 Lm/W	

CCT

3000 KELVIN	K30
3500 KELVIN	K35
4000 KELVIN	K40

STANDARD LENGTHS

2', 3', 4', 6', 8' AND 12'	2, 3, 4, 6, 8 or 12
----------------------------	---------------------

FINISHES


<i>Standard Finish</i>	
MATTE WHITE	F01M
<i>Premium Finishes</i>	
GLOSS WHITE	F01G
IVORY	F02
STONEWASH	F03
CAMEL	F04
GRAY DAY	F05
PEBBLE BEACH	F06
STEEL	F07
GRAY SEAL	F08
MOCHA	F09
BRONZED	F10
GLOSS BLACK	F11G
MATTE BLACK	F11M
ULTRASONIC CLEAR	F12
MERLOT	F13
RED SKIES	F14
LEMON	F15
FOREST HUNTER	F16
BLUE PRINT	F20
REFLEX BLUE	F21
NAVY	F22
CUSTOM COLOR	FCC

VOLTAGE

120, 277	120V or 277V
----------	--------------

OPTIONS


FROSTED .060" THICK	
POLYCARBONATE DUST COVER	FDC
NIGHT LIGHT CIRCUIT	NLCKT
EMERGENCY CIRCUIT	EMCKT
EMERGENCY BATTERY PACK (6 Watt)	EBPL
EMERGENCY BATTERY PACK (10 Watt)	EBPH
DIMMING	DIM
FUSED DRIVERS	FS
GENERATOR TRANSFER DEVICE	GTD
DAMP LOCATION	DL
90° CONNECTOR—INSIDE CORNER	L90I
90° CONNECTOR—OUTSIDE CORNER	L90O



SQUARE




CLASSICAL



ROUND



STEPPED



L90I



L90O