

Project Name:

Qty:

Type:

Product Number:

FEATURES

- ▶ Tunable White or Single CCT
- ▶ Custom finishes available
- ▶ Integrated sensor option available
- ▶ Fully rotatable: 359°

SPECIFICATIONS


Lumens:	CCT:	CRI:	Voltage:	Efficacy:
Medium 527 Lm/ft	Standard: 2700K	Tunable White*: 2700K - 6500K	90	Standard: 80 Lm/W - High Output
High 832 Lm/ft	3000K		80	120 - 277V AC
(Custom lumen outputs available upon request)*	3500K	RGBW**: Color changing	Optional: 347V AC	Standard: 88 Lm/W - Medium Output (depending on options)
	4000K			
	5000K	** MUST contact manufacturer		

Electrical:	Dimming:	Lifespan:	Finish:
4 - 8 W/ft PF > 0.9 THD < 9.8%	Standard: 0-10V 1% Optional*: 0-10V 10% 0-10V 5% Dim to O Step Dimming	Standard: L70 > 100,000 hr. @ 25° C	Standard: Constructed of one-piece .063" thick extruded aluminum, with set-screw locking provisions on both ends. Die-cast aluminum support modules and end plates.

Optics:	Operating temp:	Warranty:	Certification:
Direct Standard: (LOH) LED-optimized high transmittance extruded snap-in acrylic lens.	-25°C to 35°C (-13°F to 95°F)	Standard: 10 Year limited warranty.	ETL listed for dry or damp locations.

*Custom options may affect pricing and advanced lead times. Contact your local PAL Lighting rep for full information.

Mounting:

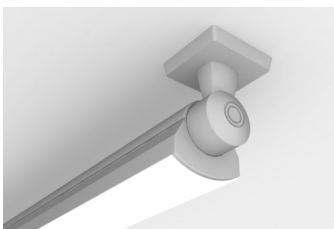


Ceiling Mount

DISTRIBUTION OPTIONS



CROSS SECTIONS

CEILING MOUNTING 359° ROTATABLE

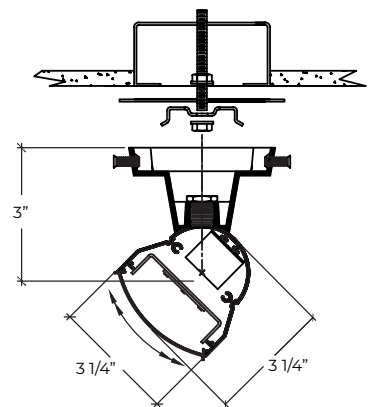

Project Name:

Qty:

Type:

Product Number:

ORDERING EXAMPLE:

ACC HO K30 80 4' JT LOH F01M UNV DIM0

1: FORM

SERIES
ACC Accentra Series (Interior)

2: OUTPUT

LUMENS (Direct)	COLOR TEMPERATURE	COLOR RENDERING
HO High Output 832 Lm/ft	K27 2700 Kelvin	80 80 CRI
	K30 3000 Kelvin	
	K35 3500 Kelvin	90 90 CRI
	K40 4000 Kelvin	
	K50 5000 Kelvin	
MO Medium Output 527 Lm/ft		
*Custom Output	TW 2700K thru 6500K (Tunable White)	

*For custom outputs enter requested Lm/Ft. **325** thru **1725**

3: LENGTH

FIXTURE LENGTH
Custom length*

*Enter requested length as single value.

Lengths start at 2' and are based on 1' nominal increments. Ex. 8 = 8'

Runs longer than 8' require round spacer between linears (spacer is approx. 1 3/16"). Spacer placement will be evenly distributed unless otherwise specified.

4: MOUNTING

MOUNTING TYPE
JT Ceiling Mount - T-Bar Ceiling
JN Ceiling Mount - Non T-Bar / Drywall Ceiling

5: OPTICS

LOH
OPTICAL CONTROL
LOH LED -Optimized High Transmittance Lens

6: FINISHES

FINISHES*
F01M Matte White (standard)
FXXX PAL Premium Colors: (F01G thru F22)
* Custom Color

*Provide RAL color number

7: ELECTRICAL

VOLTAGE	DRIVER
UNV 120 - 277VAC	DIM0 0-10V 0%
120 120VAC	DIM1 0-10V 1%
277 277VAC	DIM5 0-10V 5%
347 347VAC	DIM10 0-10V 10%
	SD Step-Dimming
	DALI 0-10V protocol driver - (TW)* EldoLED DUALdrive
	0-10V 0-10V protocol driver - (TW)* EldoLED DUALdrive

* Tunable White power supply by EldoLED is UL recognized, and is compatible with DALI, DMX, and 0-10V protocols.

8: EMERGENCY BACKUP & CONTROLS (Optional)

SENSOR OPTIONS	EMERGENCY OPTIONS	CONTROLS
OCC Occupancy/Motion Sensor (Integral Mount)	EBPHST Emergency Battery Pack (self-testing)	0-10V 0-10V dimming
DS Daylight/Photocell Sensor (Integral Mount)		CASAMBI Wireless controls with Casambi

Project Name:

Qty:

Type:

Product Number:

PHOTOMETRY

ACC-HO-K35-LOH

High Output




Catalog Number:
ACC-HO-K35-80-4'-X-LOH-120

Report Number:
#ITL - 80856.ies

Total Efficacy:
80.1 Lms/W
Input Power per 4':
41.50 Watts

0% Up 100% Down
Color Rendering Index
(CRI) = 83

To see the complete photo-
metric report, visit:
[ACC-HO-K35 Report](#)

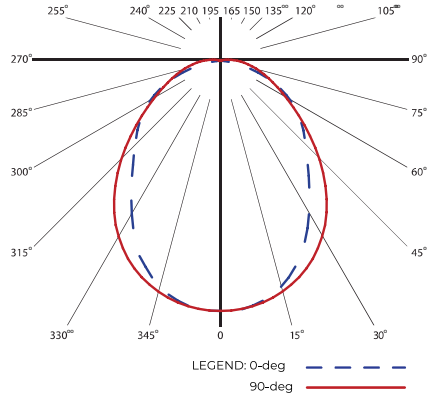

ACC-MO-K35-LOH

Medium Output




Catalog Number:
ACC-MO-K35-80-4'-X-LOH-120

Report Number:
#ITL - 80857.ies

Total Efficacy:
88.1 Lms/W
Input Power per 4':
23.90 Watts



0% Up 100% Down
Color Rendering Index
(CRI) = 83

To see the complete photo-
metric report, visit:
[ACC-MO-K35 Report](#)

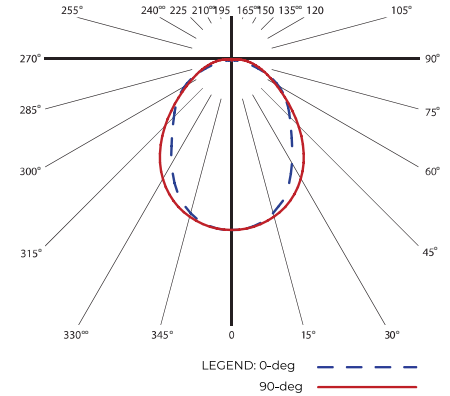

STANDARD FIXTURE LENGTHS & MOUNTING CENTERS

CEILING MOUNT - 359° ROTATABLE

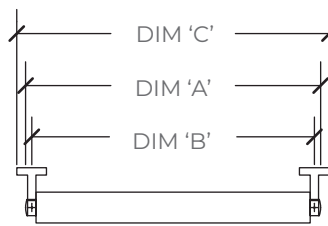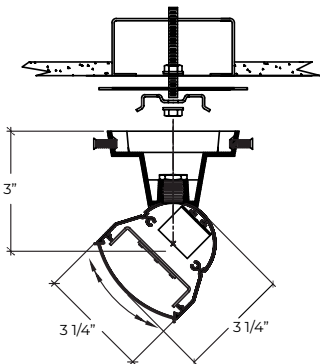

FIXTURE LENGTH	MOUNTING CENTERS	*O.A. DIMENSION CENTERS
DIM 'A'	DIM 'B'	DIM 'B'
26 3/4 "	25 "	28 1/4 "
38 1/4 "	36 1/2 "	39 3/4 "
49 3/4 "	48 "	51 1/4 "
74 3/4 "	73 "	76 1/4 "
97 3/4 "	96 "	99 1/4 "

* INCLUDES SUPPORT BRACKETS

Installation Sheet

Project Name:

Qty: Type:

Product Number:

ADDITIONAL FINISHES

F01M
WHITE - MATTE

F01G
WHITE - GLOSS

F11M
BLACK - MATTE

F11G
BLACK - GLOSS

F10
BRONZE

F12
ULTRASONIC CLEAR

F02
IVORY

F03
STONE WASH

F05
GRAY DAY

F07
STEEL

F08
GRAY SEAL

F09
MOCHA

F04
CAMEL

F06
PEBBLE BEACH

F14
RED SKIES

F15
LEMON


F16
FOREST HUNTER

F20
BLUE PRINT

F21
REFLEX BLUE

F22
NAVY

BOM EXAMPLE

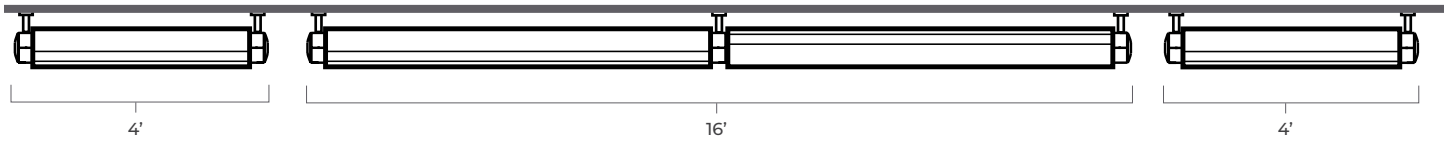

Example BOM

Qty.	Product Number
1	ACC MO K40 90 16 JT LOH F01M UNV DIM0
2	ACC MO K40 90 4 JT LOH F01M UNV DIM0