

Project Name:

Qty:

Type:

Product Number:

FEATURES

- ▶ 16 different width profiles
- ▶ Custom joiners for unique designs
- ▶ Fully illuminated joiners
- ▶ Tunable white / RGBW options
- ▶ Magnetic lens and end caps for quick installation
- ▶ 2 end cap options

QUICK GLANCE

MOUNTING OPTIONS



Aircraft
cable



Stem

SPECIFICATIONS

Lumens:	CCT:	CRI:	Voltage
Medium 400 Lm/ft	Standard: 3000K Tunable White:* 2700K - 6500K	90 80	Standard: 120 - 277V AC
High 750 Lm/ft	3500K 4000K	RGBW:* Color changing	
(Custom lumen outputs available upon request)*			

Electrical	Dimming	Lifespan	Finish
6 - 14 W/ft PF > 0.9 THD < 9.8%	Standard: 0-10V 1% Optional:* 0-10V 10% 0-10V 5% Dim to O Step Dimming	Standard: L70 > 100,000 hr. @ 25° C	Standard: Textured Matte White / Black (Custom finish upon request)*

Optics	Operating temp:
Direct Standard: Medium beam angle - flat, frosted PC lens.	-25°C to 35°C (-13°F to 95°F)
Indirect Standard: Medium beam angle - flat, frosted PC lens.	

Housing:	Warranty	Certification
Extruded aluminum with powder coated finish.	Standard: 10 Year limited warranty.	UL listed for dry location application only - IP20 equivalent.

*Custom options may affect pricing and advanced lead times. Contact your local PAL Lighting rep for full information.



TAA
COMPLIANT

DISTRIBUTION OPTIONS



Direct



Indirect




Indirect/Direct

END CAPS



Flat

CROSS SECTIONS

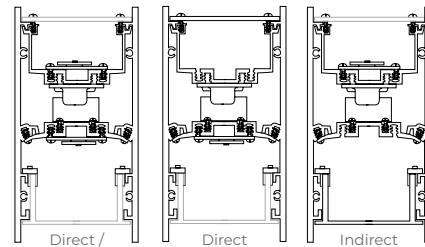

FORM / JOINER QUICK VIEW



Linears

Height: 5.12"

Length: 5.51" increments starting at 1' 11"

Width: 3" - 6" 0.2" increments

Flat
End Cap



90° joiners

"L" / "T" / "X"

11" "arm"
T and X - 22" total length.
Lengths may differ between profile widths.



Curved
Joiners

30° / 45° / 60°
90°

17" radius
32.5" radius
48.5" radius



Y and V
Curved Joiners

45° / 60°

17" radius
32.5" radius
48.5" radius



Project Name:

Qty: Type:

Product Number:

ORDERING GUIDE

ORDERING EXAMPLE:

LIT-I/D 40 HO HO K40 90 12 C FAL F01M CE UNV DIMO

1: FORM

2: OUTPUT

SERIES	WIDTH	LUMENS (Indirect)**	LUMENS (Direct)**	COLOR TEMPERATURE	COLOR RENDERING
LIT-D Lasso Infinite "Tall" (5.12" height) Direct	30 3"	HO High Output 750 Lm/ft	HO High Output 750 Lm/ft	K30 3000 Kelvin	80 80 CRI
LIT-I Lasso Infinite "Tall" (5.12" height) Indirect	40 4"			K35 3500 Kelvin	
	50 5"	MO Medium Output 400 Lm/ft	MO Medium Output* 400 Lm/ft	K40 4000 Kelvin	90 90 CRI
LIT-I/D Lasso Infinite "Tall" (5.12" height) Indirect / Direct	60 6"			TW 2700K thru 6500K (Tunable White)	
	Custom width*	** Custom Output	** Custom Output	RGBW RGBW - Color changing	

Lasso Infinite series is available in a "Tall" (5.12" height) and "Short" (3.94" height) - see separate spec on www.pal-lighting.com

* Custom widths are in 0.2" increments. Ordering ex. 34 would be 3.4" / 56 would be 5.6" / 42 would be 4.2"

** Only Direct / Indirect will require both part numbers. For custom outputs enter requested Lm/Ft (see chart below)
Custom ex. **650 / 420** would be 650 Lm/ft direct and 420 Lm/ft indirect.

3: LENGTH

4: MOUNTING

5: OPTICS

6: FINISH

7: ELECTRICAL

FIXTURE LENGTH	MOUNTING*	LENS	HOUSING FINISH	END CAPS	VOLTAGE	DRIVER
Custom length*	C Screw-in clutch, aircraft cable.	FAL Frosted acrylic lens	F01M WHITE - TEXTURED MATTE	FE Flat end cap	UNV 120 - 277V AC	DIM1 0-10V 1%
*Enter requested length. Lengths start at 2' (1' 11") Lengths are based on 5.51" increments. Ex. 8' (8' 4" or 7' 10")	P Pendant / stem, with canopies.		F11M BLACK - TEXTURED MATTE			DIM0 0-10V 0%
	*Additional mounting options available - see separate spec on www.pal-lighting.com		Custom Color Enter RAL # _____			DIM5 0-10V 5%
						DIM10 0-10V 10%
						SD Step-Dimming
						TW DALI protocol
						RGBW DMX protocol

8: EMERGENCY BACKUP & CONTROLS

CUSTOM PATTERNS (Describe the requested form/pattern - ex. "I hexagon, approx. 4' in width")

SENSOR OPTIONS	EMERGENCY OPTIONS	CONTROLS
OCC Occupancy/Motion Sensor (Integral Mount)	EBPH Emergency Battery Pack (self-testing)	0-10V 0-10V dimming
DS Daylight/Photocell Sensor (Integral Mount)		DALI (Tunable white)
		DMX (RGBW)
		CASAMBI Wireless controls with Casambi

Use page 3 and 4 for joiner information and optional grid for illustration of concept.

Custom output min. / max.

Lumen Outputs - Lm/ft (based on 4000K output)																
Width	30 3"	32 3.2"	34 3.4"	36 3.6"	38 3.8"	40 4"	42 4.2"	44 4.4"	46 4.6"	48 4.8"	50 5"	52 5.2"	54 5.4"	56 5.6"	58 5.8"	60 6"
Direct - Min.	370	384	398	412	426	536	446	459	465	470	476	482	487	493	499	504
Direct - Max.	862	895	928	961	994	1,017	1,040	1,071	1,084	1,097	1,111	1,124	1,137	1,050	1,164	1,177
Indirect - Min.	332	344	357	370	383	393	400	412	417	422	427	432	437	443	448	453
Indirect - Max.	774	804	833	863	892	913	934	961	973	985	997	1,009	1,020	1,032	1,044	1,056



Project Name:

Qty:

Type:

Product Number:

JOINERS



Corners	
L/90	"L" joiner, 90° angle
T/90	"T" joiner, 90° angles
X/90	"X" joiner, 90° angles

Curves 45" radius	
45R/90	90° bend
45R/60	60° bend
45R/45	45° bend
45R/30	30° bend

Curves 33" radius	
33R/90	90° bend
33R/60	60° bend
33R/45	45° bend
33R/30	30° bend


Curves 17" radius	
17R/90	90° bend
17R/60	60° bend

Y Bends	
Y-45R/45	45° radius / 45° bend
Y-33R/45	33° radius / 45° bend
Y-17R/60	17° radius / 60° bend


V Bends	
V-45R/45	45° radius / 45° bend
V-33R/45	33° radius / 45° bend
V-17R/60	17° radius / 60° bend



L/90




45R/90




33R/90




17R/90




Y-45R/45




V-45R/45



T/90




45R/60




33R/60




17R/60




Y-33R/45



V-33R/45




X/90




45R/45




33R/45



Y-17R/60



V-17R/60



45R/30



33R/30

Project Name:

Qty:


Type:

Product Number:

PHOTOMETRY


LIT-D 30 HO K40

3" - 750 lm/ft - 4000K

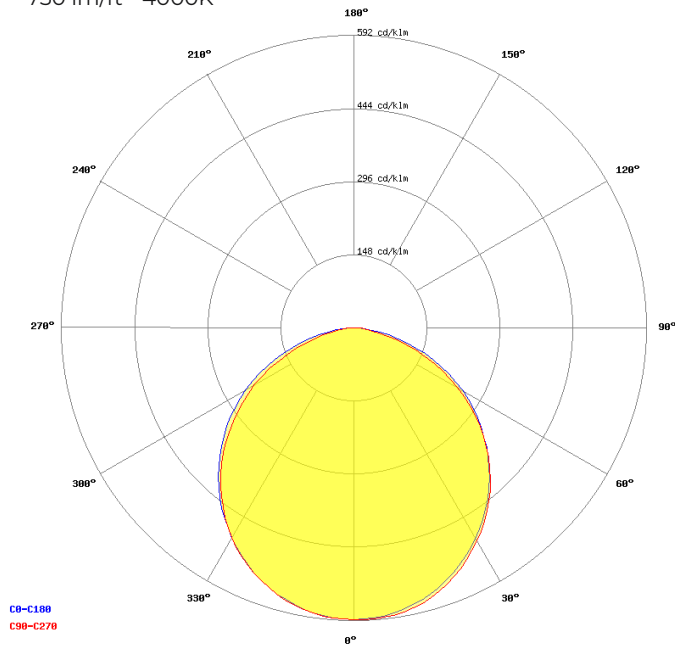


LIT-D 40 HO K40

4" - 750 lm/ft - 4000K

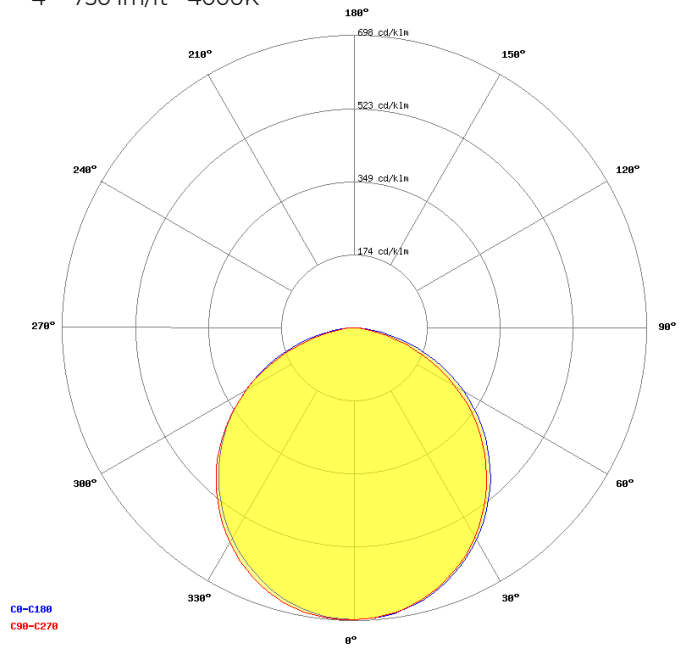


LIT-D 50 HO K40

5" - 750 lm/ft - 4000K

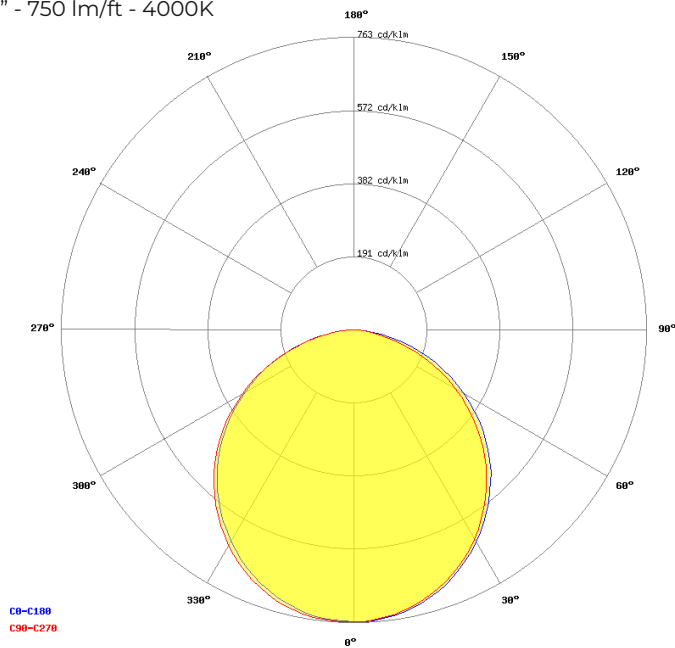

LIT-D 60 HO K40

6" - 750 lm/ft - 4000K

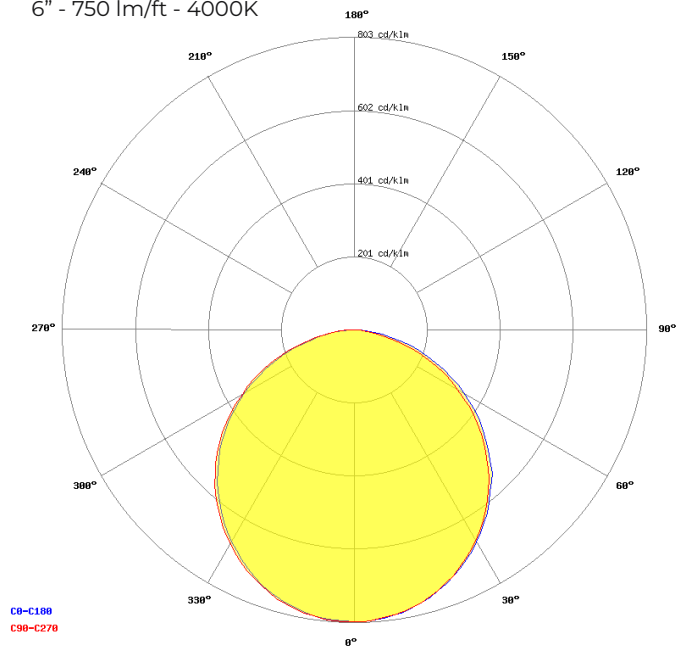


Project Name:

Qty: Type:

Product Number:


BOM EXAMPLE

Example 1

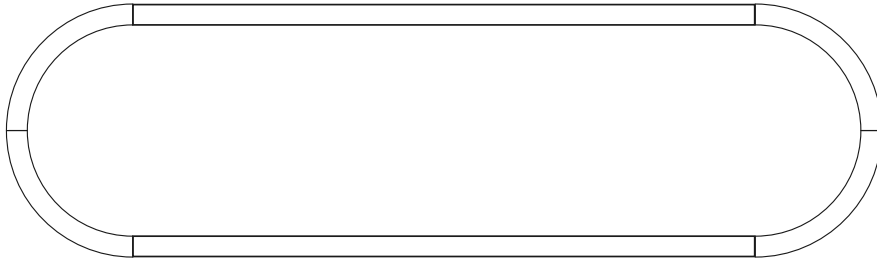

Example 1 BOM	
Qty.	Product Number
2	LIT-D 40 MO K40 90 8 C FAL F11M FE UNV
4	33R/90

Example 2

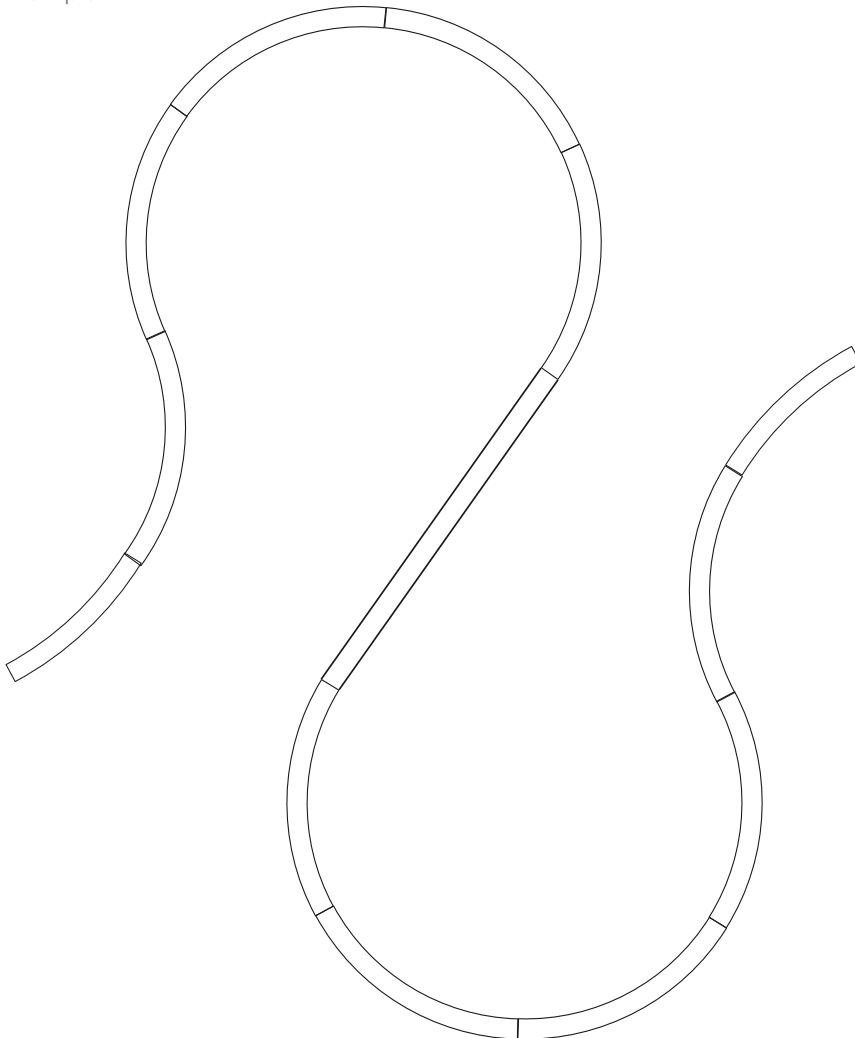

Example 2 BOM	
Qty.	Product Number
1	LIT-D 30 HO K40 90 6 C FAL F01M FE UNV
10	33R/60
2	48R/30

Project Name:

Qty:

Type:

Product Number:

Grid

Use the grid below for optional pattern / run drawing.



1' x 1'

