


INSTALLATION INSTRUCTIONS

- 1 Screw (Provided)
- 2 Recessed Clip
- 3 Luminaire
- 4 Diffuser
- 5 Ceiling

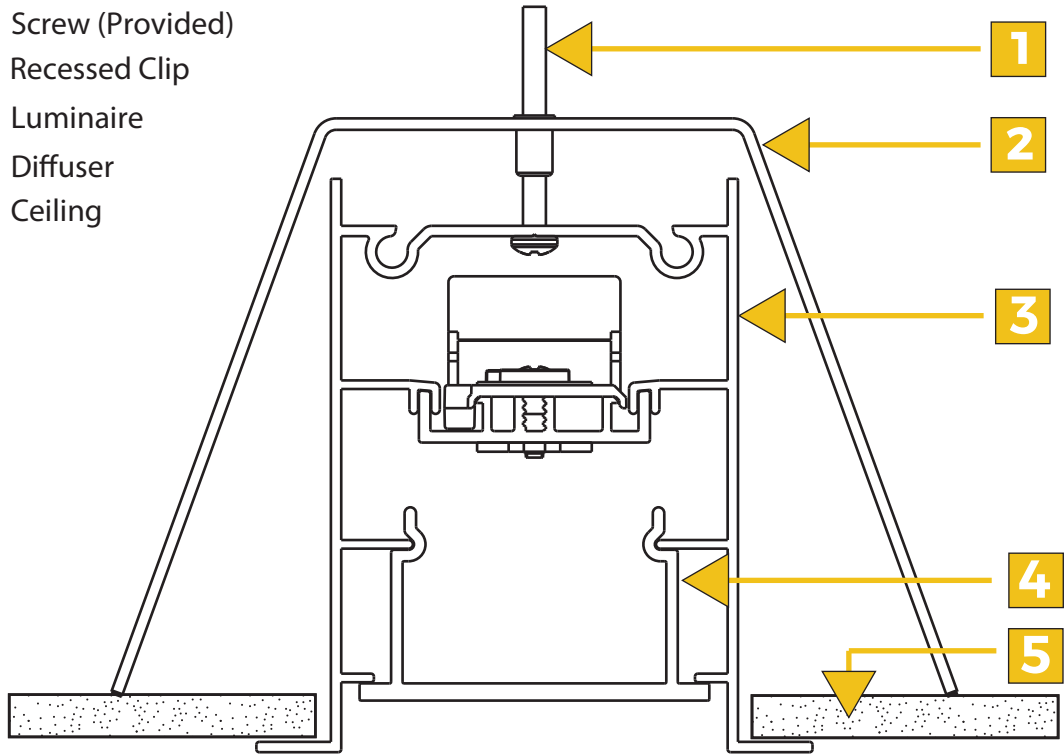

1

Recessed Clip and Luminaire

Suspension Plan

Note: Ensure ceiling construction can support luminaire weight

3

Determine mounting location

3 Rough opening width = $W + 9/32"$

Ensure ceiling cut out (rough opening) is the correct length and width

4

Fix templates provided to ceiling and trace cut-out shape.

Note: Template parts have interlocking ends

5

Remove diffuser

Note: Position diffuser relative to body section

6 Remove gear-tray

Note: Only remove the plain steel fasteners DO NOT remove the black fasteners

7

Ensure *screws are at maximum extension

8

Make sure power is connected in ceiling while fixture is placed into position

9

While unit has been lifted into place, ensure clip can squeeze into ceiling rough opening

10

Push screws thru fixture & fully into mounting clip once unit is in place. Ensure recessed clip legs secure unit into ceiling

11

Tighten screw(s) ensuring clips are kept parallel and even. Do not overtighten

12

If more than one piece, engage the latch

13

NOTE: If latch does not bring fixture sections together, adjust by turning the latch hook

14

Replace gear-tray, then re-assemble diffuser

WARNING: Take care to replace diffuser and gear-tray to original location

WARNING

1. Ensure luminaire is kept horizontal during the process of lifting it into the ceiling.
2. If there is more than one section of luminaire, insert each piece into the ceiling separately and then connect.

NOTE: When installing the last section in a multiple section luminaire - there are no joining pins or latch across the joint.