

| | |
|----------------|------|
| Catalog Number | Type |
| Project Name | |

Paladia

Perimeter Series

PPSQ01 • PPST01 • PPCL01 • PPRD01



**4" x 3" Indirect Wall Mount
(T8, T5 or T5HO Lamps)
Square, Stepped, Classical,
or Rounded Fascia**

ADA Compliant

S P E C I F I C A T I O N S

Fixture Wireway

One-piece .060" thick extruded aluminum finished satin black enamel. Standard lengths are available up to 12' in one piece sections. Provisions may be made for patterns and continuous rows of any length.

Fascia

One-piece .060 thick extruded aluminum available up to 12' in one piece sections.

Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability.

Reflector

Die-formed from .023" thick high reflectance semi-specular aluminum with grain running perpendicular to the length of the reflector.

Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

Circuitry


All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

Controls


Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

Certification


All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.




PPSQ01




PPST01



PPCL01



PPRD01

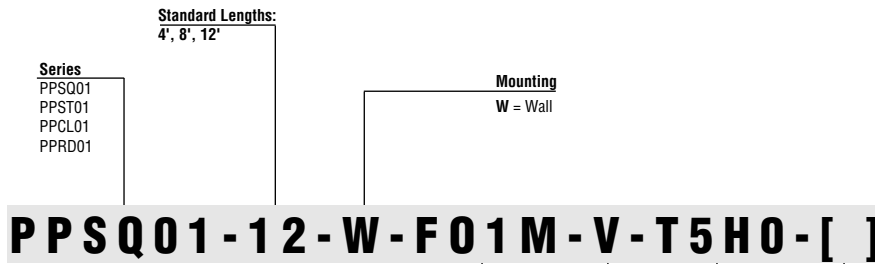

Standard Finishes

- F01M Matte White
- Premium Finishes**
- F01G Gloss White
- F02 Ivory
- F03 Stonewash
- F04 Camel
- F05 Gray Day
- F06 Pebble Beach
- F07 Steel
- F08 Gray Seal
- F09 Mocha
- F10 Bronzed
- F11 Black
- F12 Ultrasonic Clear

- F13 Merlot
- F14 Red Skies
- F15 Lemon
- F16 Forest Hunter
- F17 Olive
- F18 Khaki
- F19 Heather Green
- F20 Blue Print
- F21 Reflex Blue
- F22 Navy
- FCC Custom Color

Voltage

- 120
- 277
- 347

Lamp Type

- T5
- T5HO
- T8

Options

- NLCKT**
Separate Night Light Circuit
- EMCKT**
Separate Emergency Circuit
- EBPL**
Emergency Battery Pack (635-700 Lumens)
- EBPH**
Emergency Battery Pack (975-1325 Lumens)
- Dim**
Dimming
- FS**
Fused Ballasts
- GTD**
Generator Transfer Device
- DC**
Clear Extruded 100% DR Acrylic Dust Cover



